

10 214

CONTRACT NO. DAAA15-90-D-0017  
Delivery Order 0002

Document No. SFIM-AEC-ER-CR-99023



U.S. Army  
Environmental  
Center

**FINAL  
SITE INVESTIGATION REPORT FOR THE  
COAL STORAGE AREA ANNEX STUDY AREA,  
SURPLUS OPERABLE UNIT,  
FORT SHERIDAN, ILLINOIS**

19990826 011

August 10, 1999

Prepared for:

**U.S. ARMY ENVIRONMENTAL CENTER  
Base Closure Division  
Aberdeen Proving Ground, Maryland 21010-5401**

Prepared by:

**QST ENVIRONMENTAL INC.  
11665 Lilburn Park Road  
St. Louis, Missouri 63146-3535**

**DISTRIBUTION STATEMENT A  
Approved for Public Release  
Distribution Unlimited**

**DTIC QUALITY INSPECTED 4**

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instruction, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE		3. REPORT TYPE AND DATES COVERED Site Investigation Report, June-August 1999	
4. TITLE AND SUBTITLE  Final Site Investigation Report for the Coal Storage Area Annex Study Area, Surplus Operable Unit, Fort Sheridan, Illinois				5. FUNDING NUMBERS  DAAA15-90-D-0017 Delivery Order 0002	
6. AUTHOR(S)  Deborah McKinley, Scott George, Ken Stringer					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  Environmental Science & Engineering, Inc. 11665 Lilburn Park Road St. Louis, Missouri 63146				8. PERFORMING ORGANIZATION REPORT NUMBER  490-2087-0600	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)  U.S. Army Environmental Center Base Closure Division Attn: SFIM-AEC-BCA Edgewood Area Building E-4480 Aberdeen Proving Ground, Maryland 21010-5401				10. SPONSORING/MONITORING AGENCY REPORT NUMBER  SFIM-AEC-ER-CR-99023	
11. SUPPLEMENTARY NOTES					
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Distribution unlimited. Approved for public release.				12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  This site investigation report presents the results of the sampling and analysis conducted at the Coal Storage Area Annex. The data are evaluated through a risk-based screening process to determine the potential risks associated with the study area, which is to be surplus. Based on a carcinogenic risk level of 1E-04, the widespread use of coal at the study area, and the consistently elevated levels of PAHs detected in the soil samples, a removal action was recommended for the Coal Storage Area Annex Study Area.					
14. SUBJECT TERMS  Coal Storage Area Annex, Surplus OU, Site Investigation, Risk Analysis, Fort Sheridan				15. NUMBER OF PAGES 80	
				16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT  Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE  Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT  Unclassified	20. LIMITATION OF ABSTRACT  UL		

---

**Final Site Investigation Report for the  
Coal Storage Area Annex Study Area,  
Surplus Operable Unit,  
Fort Sheridan, Illinois**

Prepared for:  
U.S. Army Environmental Center  
Edgewood Area  
Aberdeen Proving Ground, Maryland 21010-5401

Prepared by:  
Environmental Science & Engineering, Inc.  
St. Louis, Missouri

August 10, 1999

ESE Project No. 490-2087-0900

---

## Table of Contents

Section	Page
<b>1.0 Introduction</b>	<b>1</b>
1.1 Site History	1
1.2 Investigative History	3
1.3 CSA Annex SI Objectives	3
<b>2.0 Study Area Investigations and Results</b>	<b>8</b>
2.1 Test Pit Excavation and Sampling	8
2.2 Field Observations	9
2.3 Laboratory Analytical Results	10
2.3.1 Data Validation	10
2.3.2 Analytical Results	10
<b>3.0 Risk-Based Screening Evaluation</b>	<b>14</b>
3.1 Data Evaluation Baseline	14
3.2 CSA Annex Study Area Risk-Based Screening	14
3.3 Risk Evaluation	15
<b>4.0 Conclusions and Recommendations</b>	<b>25</b>
<b>5.0 References</b>	<b>26</b>



**Table of Contents (continued)****List of Tables**

Table 2-1	Detection Summary of Organic Constituents in CSA Annex Soil . . . . .	12
Table 3-1	Results of CSA Annex Risk-Based Screening . . . . .	16
Table 3-2	Carcinogenic Risks for the CSA Annex . . . . .	24

**List of Figures**

Figure 1-1	Site Location . . . . .	4
Figure 1-2	Fort Sheridan Operable Units . . . . .	5
Figure 1-3	Study Area Location . . . . .	6
Figure 1-4	Sampling Locations . . . . .	7

**List of Appendices**

Appendix A	Test Pit Logs
Appendix B	Analytical Data Sheets
Appendix C	Data Validation

**Table of Contents (continued)****List of Acronyms and Abbreviations**

ANL	Argonne National Laboratory
B43	Building 43
BCT	BRAC Cleanup Team
BEC	BRAC Environmental Coordinator
BRAC	Base Realignment and Closure
CSA	Coal Storage Area
DER	Data Evaluation Report
DI	deionized water
DoD	Department of Defense
ft-bgs	feet below ground surface
HASP	Health and Safety Plan
IEPA	Illinois Environmental Protection Agency
mg/kg	milligrams per kilogram
OQAPP	Overall Quality Assurance Project Plan
OU	Operable Unit
PAH	polynuclear aromatic hydrocarbons
POL	petroleum, oils, and lubricants
PRG	Preliminary Remediation Goals
QC	quality control
RI/FS	Remedial Investigation/Feasibility Study
SI	Site Investigation
TEP	Technical Evaluation Plan
USEPA	U.S. Environmental Protection Agency

## 1.0 Introduction

This section of the Site Investigation Report for the Coal Storage Area Annex Study Area (CSA Annex SI) includes a brief description and history of Fort Sheridan and the Surplus Operable Unit (OU) and a discussion of the objectives, scope, and approach for the CSA Annex study area. This CSA Annex SI addresses only the aforementioned CSA Annex study area.

The Sampling and Analysis Plan for this study area referred to it as the CSA2 Annex study area (QST, 1999). However, it appears this study area is separate from CSA2 and lies in between CSA2 and CSA3. Therefore, this study area is more appropriately referred to in this document as the CSA Annex study area.

### 1.1 Site History

Fort Sheridan is located approximately 25 miles north of Chicago along the western shore of Lake Michigan. The installation location is shown in Figure 1-1. Fort Sheridan, named for General Phil Sheridan, was established in 1887 in the wake of the Great Chicago fire of 1871 and at the request of Chicago city leaders following labor riots of 1886. The installation is bounded by the towns of Highwood to the west, Highland Park to the south, and Lake Forest to the north. Fort Sheridan covers an area of approximately 712 acres. The land occupied by Fort Sheridan is approximately 50 feet above Lake Michigan. The topography is relatively flat and gently sloping toward Lake Michigan. The lake side of the installation terminates in a bluff or embankment that extends the full length of the boundary and beyond.

The Fort Sheridan area has been developed since the mid-1800s and was the site of heavy industry including logging, a lumber mill, leather tanning, brick making, and iron casting (Melichar, 1995). Land was transferred to the government for a token fee of \$10 by three members of the Commercial Club of Chicago: Adolphus Bartlett, Charles Hutchinson, and John Janes. Three ravines at Fort Sheridan are named for these individuals.

Troops trained at Fort Sheridan served in the Spanish-American War in 1898, the Mexican Intervention in 1913, and World Wars I and II. Fort Sheridan was a training center for anti-aircraft artillery units during World War II. From the 1950s until 1974, Fort Sheridan served as maintenance and supply center to NIKE air-defense missile systems for the Chicago, Gary, Detroit, Minneapolis-St. Paul, and Milwaukee air-defense network. Three NIKE missile silos were installed in the northern part of Fort Sheridan. These silos have been largely stripped of equipment and abandoned.

In 1988, the Commission on Base Realignment and Closure (BRAC) recommended Fort Sheridan, Illinois for closure to the Secretary of Defense. The installation ceased military operations as an Army facility in May 1993. Subsequently, portions of the installation were realigned to the U.S. Navy and U.S. Army Reserve. Approximately 100 acres are now owned by the U.S. Army Reserve and used for equipment storage and disbursement, training, and administrative functions. Approximately 200 acres are now owned by the Navy and are used for family housing, administration, vehicle maintenance, communications and training. Approximately 300 acres have been transferred to private ownership, about 40 acres are awaiting property transfer, and the remainder of the installation (approximately 60 acres) is still under Army jurisdiction and will be transferred to private ownership upon completion of environmental investigation and/or restoration activities.

To support decisions regarding preparation of the property for release, the Department of the Army has implemented environmental studies and will conduct restoration activities (if needed) before property transfer. The Army conducts these activities under the Defense Environmental Restoration Program and the BRAC program.

Fort Sheridan was divided into two principal OUs in 1995 to facilitate the implementation of the remedial investigation/feasibility study (RI/FS) and expedite the reuse of surplus Army property under the BRAC program. The first OU, designated the Surplus OU, consists of the excess installation property planned for disposal and reuse. This area occupies the north end of Fort Sheridan and is primarily composed of the golf course and historic district. The second OU is designated the Department of Defense (DoD) OU since this area has been realigned to the U.S. Navy and U.S. Army Reserves. It includes most of the area to the south of Bartlett Ravine and the Army Reserve area in the northwest corner of Fort Sheridan. The boundaries of the two OUs are indicated in Figure 1-2.

A RI/FS is currently being conducted for the Surplus OU at Fort Sheridan. The Surplus OU consists of property that has been declared excess by the Army and will be or has been transferred to the local communities. The CSA Annex study area is located within the Surplus OU (Figure 1-3). The CSA Annex study area is bounded on the east by the U.S. Navy property line, the west by Thorpe Road, and the south by CSA2 (Figure 1-4). This new study area was created to characterize the area in the vicinity of soil Boring B43SB04 that extends south from the southern edge of the CSA3 removal action to CSA2. The area occupied by the CSA Annex is currently leased to the Cities of Highland Park and Highwood. This area will be transferred to the two cities upon completion of the environmental restoration activities. This property is expected to be assigned to residential use.

## 1.2 Investigative History


Preliminary assessments of Fort Sheridan, conducted in 1982 and 1989, identified several areas on the installation affected by previous landfilling activities; storage and handling of petroleum, oils, and lubricants (POL), as well as other motor pool wastes; former CSAs; and storage and handling of various chemicals [Gross *et al.*, 1982; Argonne National Laboratory (ANL), 1989]. The nature and duration of these activities at Fort Sheridan justified conducting investigation activities to verify and quantify the nature and extent of associated chemical constituents in the environment, perform human health and environmental risk assessments, and, if necessary, evaluate remedial action alternatives leading to individual study area response actions.


During the Phase II RI investigation, soil Boring B43SB04 was completed and sampled. Soil Boring B43SB04 was initially associated with the Building 43 (B43) study area, even though it is located across former Thorpe Road from B43 (see Figure 1-4). This soil boring was completed to assist in the evaluation of a potential solvent release from B43. However, evaluation of the data obtained from B43SB04 and other soil borings collected in the vicinity of B43 indicated that the release was limited to a small area near the entrance to B43 and that B43SB04 was, in fact, located in an area physically and chemically separate from the B43 study area. Elevated levels of polynuclear aromatic hydrocarbons (PAHs) were detected in the surface sample collected from B43SB04. Therefore, additional soil sampling was conducted on April 21, 1999 to delineate the degree and extent of the PAHs within the CSA Annex study area. During this investigation, seven test pits were excavated and sampled within the CSA2 Annex study area.


## 1.3 CSA Annex SI Objectives

The objectives of the investigations at the CSA Annex study area were to:


1. Characterize the nature and extent of mission-related constituents in the CSA Annex soils;
2. Identify and characterize potential risks posed to human and environmental receptors by means of a conservative risk-based screening process; and
3. Determine, on the basis of the risk-based screening process, whether further evaluation or action is necessary to protect human health and the environment.

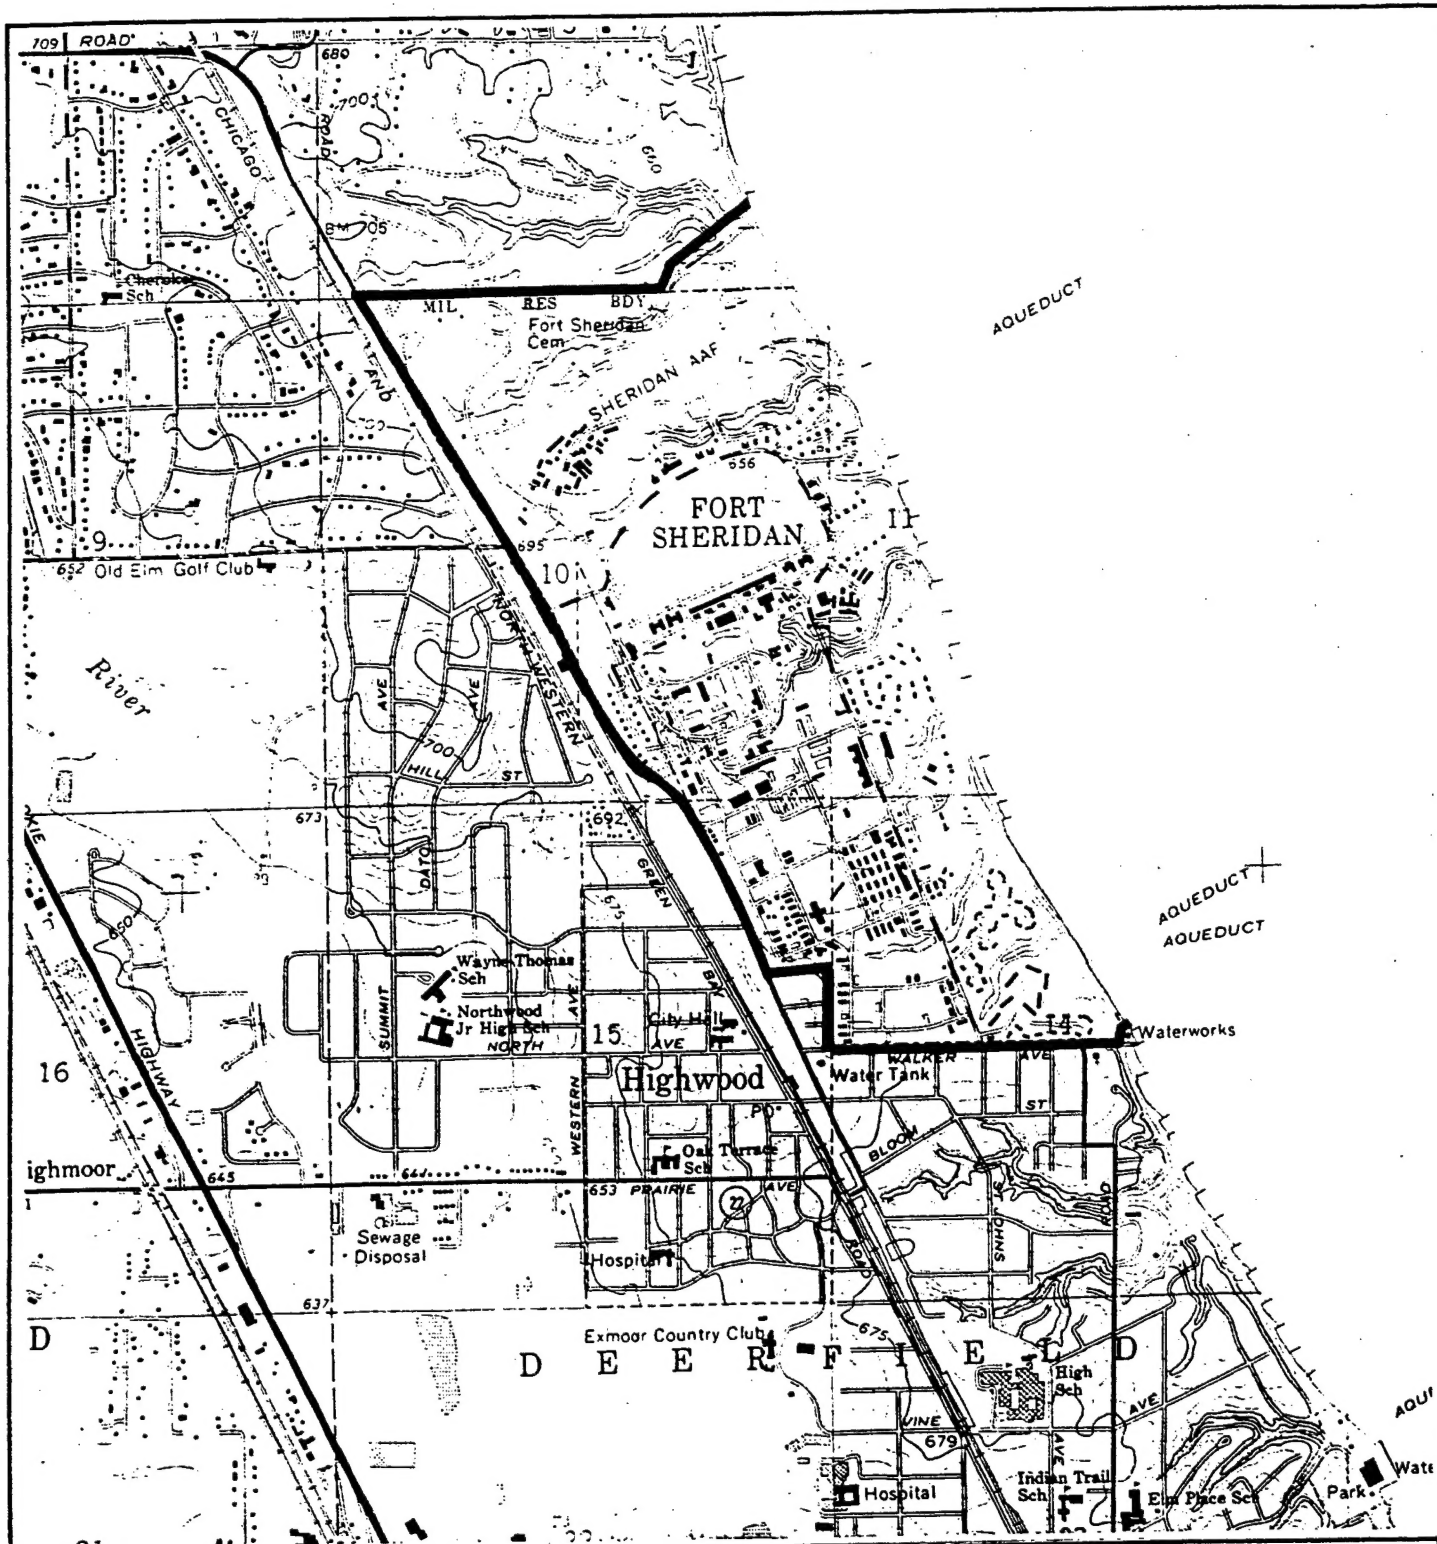






ILLINOIS



QUADRANGLE LOCATION


Project #490-2087  
Adapted From USGS Topographic Quadrangle:  
Highland Park, Illinois, 1980.



0 2000  
feet

**Figure 1-1**  
**Site Location**

Final CSA Annex SI Report  
Surplus Operable Unit  
Fort Sheridan, Illinois

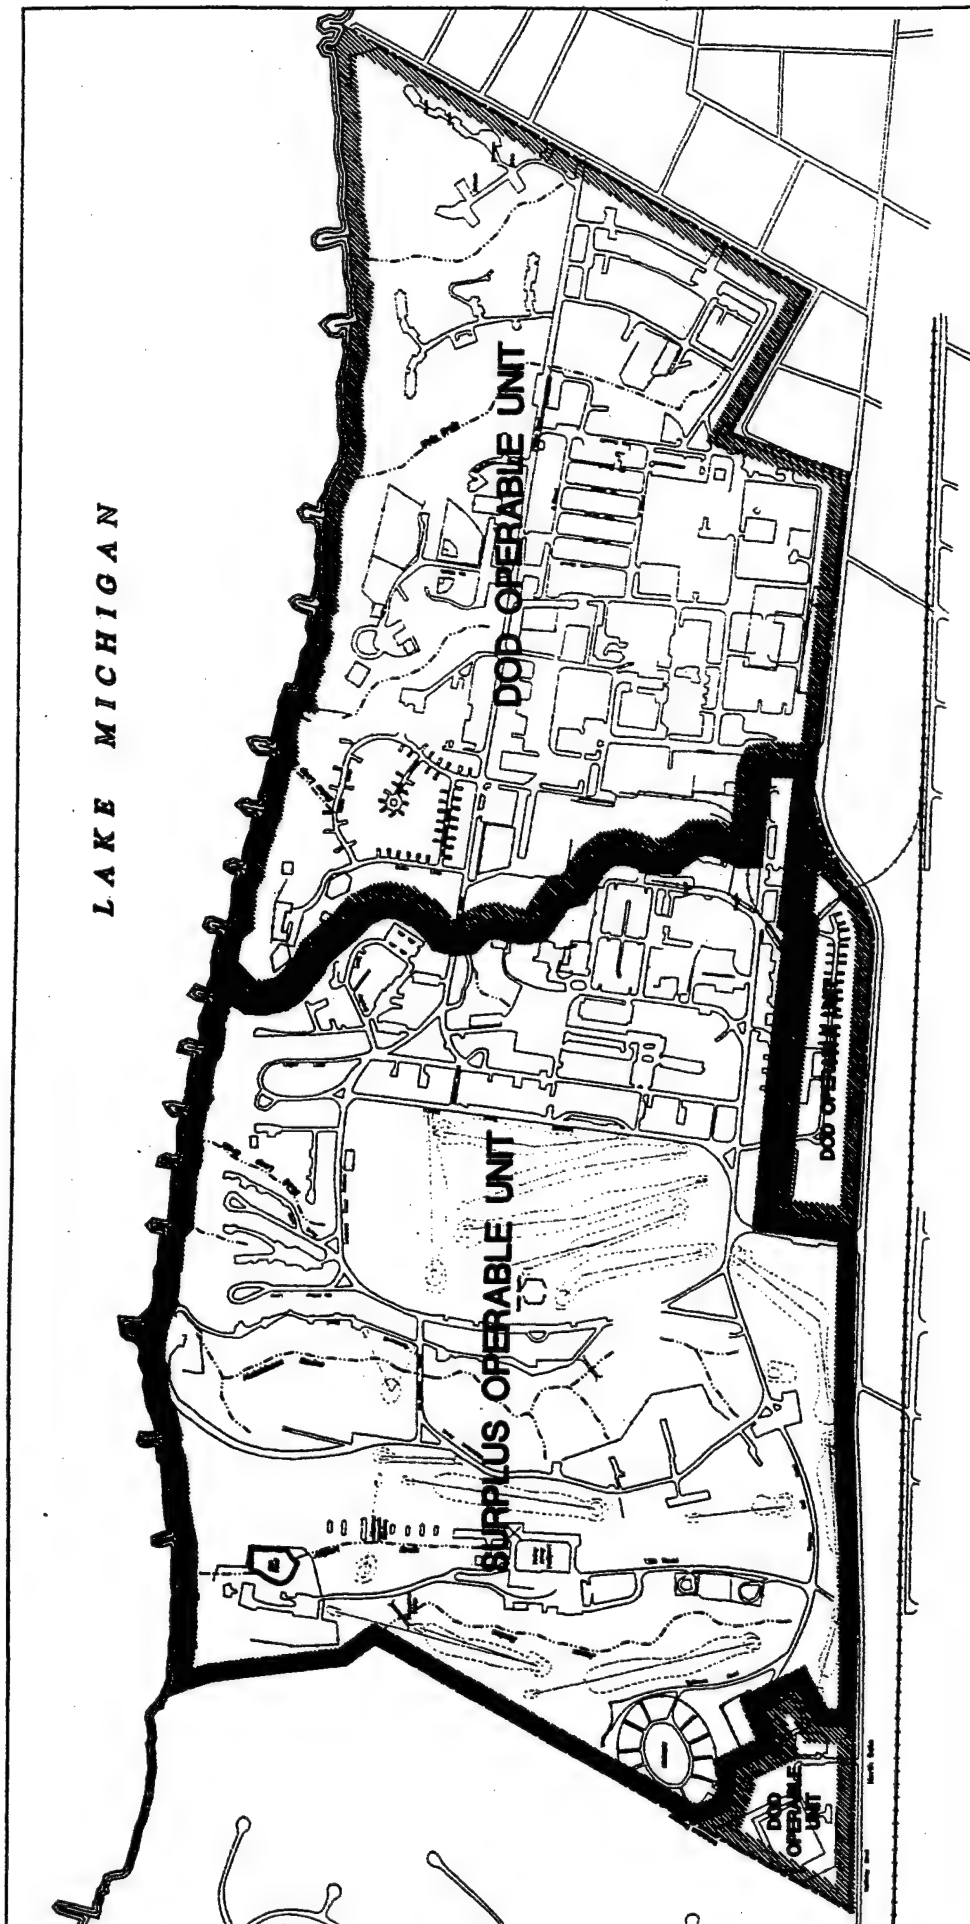

LAKE MICHIGAN

DOD OPERABLE UNIT


SURPLUS OPERABLE UNIT

DOD OPERABLE UNIT

Adapted from Official Post Map, Directorate of Engineering and Housing, Fort Sheridan, Illinois, January 6, 1989


**Figure 1-2**  
**Fort Sheridan Operable Units**

Final CSA Annex SI Report  
Surplus Operable Unit  
Fort Sheridan, Illinois



DVL 11/28/94  
Revised JCF 03/09/98  
490-2087  
-LF340U2



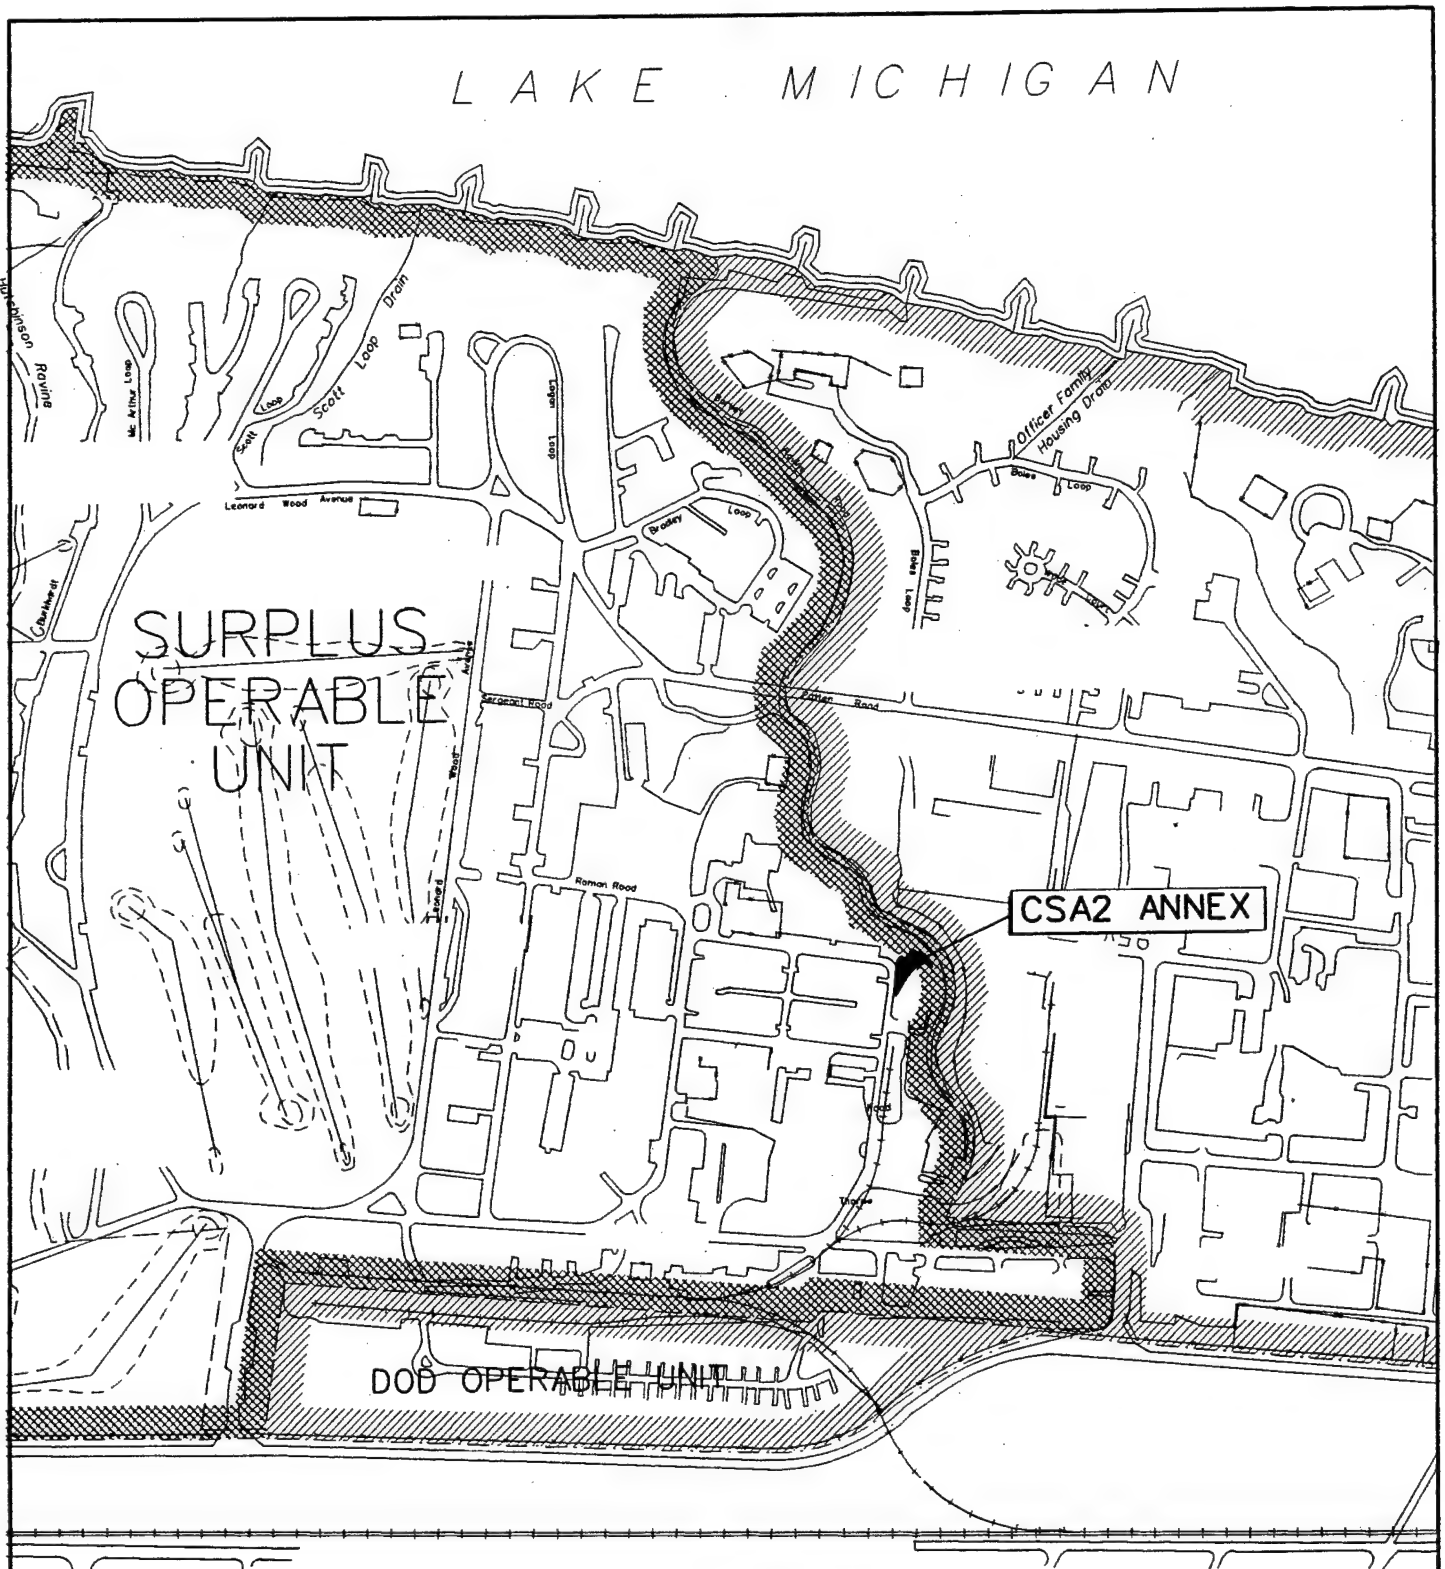

## Figure 1-3 Study Area Location

Final CSA Annex SI Report  
Surplus Operable Unit  
Fort Sheridan, Illinois

0 300 600 1200  
feet

DVL 01/05/95  
Revised

490-2087  
3s2df1-3.dgn


Adapted from Official Post Map, Directorate  
of Engineering and Housing, Fort Sheridan, Illinois,  
January 6, 1989





**Figure 1-4  
Sampling Locations**

Final CSA Annex SI Report  
Surplus Operable Unit  
Fort Sheridan, Illinois



Soil Boring Location  
Test Pits

**ESE**  
A MACTEC COMPANY  
490-2087  
CSA2F4.DGN

## 2.0 Study Area Investigations and Results

The investigation activities presented in this CSA Annex SI were conducted in consultation with representatives from the U.S. Environmental Protection Agency (USEPA) and Illinois EPA (IEPA). These two agency representatives, together with the Fort Sheridan BRAC Environmental Coordinator (BEC), comprise the BRAC Cleanup Team (BCT).

### 2.1 Test Pit Excavation and Sampling

Seven test pits were excavated in the CSA Annex study area on April 21, 1999 with a backhoe. The location, length, and orientation of the test pits are shown in Figure 1-4. The test pits were excavated in accordance with the protocols and procedures in Section 4.4.1 of the Overall Quality Assurance Project Plan (OQAPP) (ESE, 1995) and the Health and Safety Plan (HASP). Test pits were excavated to a depth of 3 feet below ground surface (ft-bgs) unless a coal layer was encountered. In those instances where a coal layer was encountered, the test pit was excavated to at least 1 foot below the coal layer or 3 ft-bgs, whichever was deeper. Completed test pits were backfilled and packed.

Five samples were collected from each test pit: one scrape sample from each of the four sidewalls and one grab sample from the floor of the test pit. The sidewall sample scrapes typically started below a surface layer of gravel and extended to the bottom of the excavation. The first step in collecting the scrape samples was to clean off the sample scrape area with a stainless-steel spoon to remove material that had been smeared against the sidewall by the backhoe during the excavation. Each sidewall sample was collected by scraping off sidewall material with a spoon into a stainless-steel bowl. The material was then mixed in the bowl before placement in the glass sample jars. Floor samples were collected from the top 6 inches of material in the center of the test pit floor using a sample spoon. The collected material was placed into a stainless-steel bowl and mixed. The mixture was then placed in the sample jar.

Sample spoons and bowls were decontaminated by washing in a deionized water (DI)/Liquinox™ solution followed by a DI water rinse after each use. The backhoe bucket and arm were steam-cleaned over the test pit just excavated, thus collecting the wash water in the test pit. After collection and packaging, the samples were shipped on ice via Federal Express Overnight to the Quanterra Environmental Services Laboratory in St. Louis, Missouri. The samples were analyzed for PAHs by USEPA Method 8310.

Previous investigations conducted at the CSA2 and CSA3 study areas have determined that concentrations of inorganic constituents at these study areas are at background concentrations and the

PAHs are the only constituents of concern at these study areas (QST, 1997a and 1997b). Therefore, it is reasonable to assume that, given mission-related activities conducted at the CSA Annex study area were the same as those conducted at CSA2 and CSA3, inorganic constituents would be at background concentrations at the CSA Annex study area. Therefore, samples were only analyzed for PAHs.

## 2.2 Field Observations

The nature of the geology encountered in each test pit was recorded in the field logbook by the geologist at the time of excavation. Test pit logs are presented in Appendix A. Field observations are summarized in the following paragraphs.

### Test Pits AXTP1A, AXTP1B, and AXTP1C

Test pits AXTP1A, AXTP1B, and AXTP1C encountered concrete slabs at approximately 0.5- to 1-foot below existing grade. These concrete slabs may be contiguous with the concrete observed in test pit AXTP05, discussed below (see Figure 1-4). A brick-lined manhole was encountered on the northern edge of AXTP1C. The fill over the concrete slabs at test pit AXTP1A consisted of a mixture of soil, gravel, and coal fill. The fill over the concrete at test pit AXTP1C consisted predominantly of coal fill.

Test pit AXTP1B was completed adjacent to B435B04 (see Figure 1-4). This test pit was approximately 14 feet long and a maximum of 6 feet deep (see Appendix A). The western wall of test pit AXTP1B consisted of approximately 8 inches of gravel, followed by about 1.25 feet of coal/cinder fill, which was underlain by 4.33 feet of brown native clay (till). The eastern wall had a different composition consisting of approximately 8 inches of gravel, underlain by approximately 3.5 feet of coal/cinder fill mixed with clay fill, which in turn was underlain by 2 feet of native clay. The northern wall of the test pit consisted of approximately 3.5 feet of gravel/rock fill underlain by native clay. The southern wall consisted of approximately 10 inches of gravel underlain by 2.3 feet of clay/gravel fill, followed by native soil. The scrape started below the surface gravel (8 to 10 inches) and extended to the bottom of the excavation. The sample scrape on the northern wall started at 3.5 feet below grade.

Test pit AXTP2 was located north of B43SB04 and encountered clean backfill that was placed after the CSA3 removal action effort. This effort is discussed in detail in the Draft Non-Time Critical Removal Action Completion Report, Buildings 42, 43, 77, and Coal Storage Area 3 (IT, 1999). A test pit log was not generated for this test pit.

Test pit AXTP3 was completed east of B43SB04 and was approximately 9 feet long and 3 feet deep. The lithology encountered was similar for each of the test pit walls. A surface layer of approximately 8 to 12 inches of gravel/clay fill was underlain by 6 inches of coal/cinder fill. This in turn was

underlain by approximately 2 to 2.5 feet of native clay. The south lithology was slightly different with approximately 10 inches of clay fill (little or no gravel), which was underlain by approximately 1 foot of coal fill before encountering native clay.

Test pit AXTP4 was completed southeast of B43SB04 and was approximately 13 feet long and 4 feet deep. Similar lithology was encountered at each of the test pit walls. The lithology consisted of approximately 8 to 10 inches of gray-brown clay soil followed by approximately 1.5 feet of coal/cinder fill, which, in turn, was followed by native clay. Only 1 inch of clay soil was present at the top of the west wall.

Test pit AXTP05 encountered a concrete slab at approximately 8 to 10 inches below grade. As stated above, the concrete encountered in test pit AXTP05 may be contiguous with the concrete observed in test pits AXTP01A and AXTP01C. The lithology in test pit AXTP05 was logged in samples collected from two walls to determine the nature of the fill over the concrete. Due to the excavation procedure and fill encountered, only the north and east walls allowed logging and sampling. The north wall contained approximately 3 inches of surface gravel, followed by 3 inches of coal fill and then approximately 10 inches of clay/rock fill. The east wall consisted of approximately 3 inches of gravel fill, followed by 2 inches of coal fill, then 3 inches of clay/rock fill.

## **2.3 Laboratory Analytical Results**

A summary of the analytical results for the Phase II RI soil boring B43SB04 as well as results from the test pit sampling are presented in this section. The analytical data sheets are presented in Appendix B.

### **2.3.1 Data Validation**

Analytical data were validated in accordance with the National Functional Guidelines (USEPA, 1994). The results of the data validation are contained in Appendix C. As a result of the validation, the concentrations reported for Samples AXTP1BS and AXTP3E are qualified J (i.e., estimated).

### **2.3.2 Analytical Results**

Organic constituents detected above method detection limits in CSA2 Annex soil samples are presented in Table 2-1. Only samples from Boring B43SB04 were analyzed for inorganic constituents. These results were previously reported in the Final Sampling Results and Data Evaluation Report for Miscellaneous Surplus OU Study Areas (Miscellaneous Study Areas DER) (QST, 1997a). The inorganic constituent concentrations detected are similar to site-specific background values.

Except for Sample AXT3F, each sample contained detectable levels of at least one PAH constituent. Benzo(a)pyrene concentrations ranged from 0.003 milligrams per kilogram (mg/kg) to 9.3 mg/kg. The highest concentration was detected in Sample AXT5E, the scrape from the east wall of Test Pit AXT05. Twelve of the 18 detections of benzo(a)pyrene were at or above 1 mg/kg. The PAH constituent with the highest reported concentration is anthracene with 32 mg/kg, followed by acenaphthene at 25 mg/kg, phenanthrene at 16 mg/kg, pyrene and fluoranthene at 14 mg/kg, and naphthalene at 12 mg/kg. Each of these detections were reported for Sample B43SB04(0'). The detection of elevated levels of PAHs is not unexpected given the presence of coal in sidewalls of the test pits.

Table 2-1. Detection Summary or Organic Constituents in CSA Annex Soil (mg/kg), Surplus OU, Fort Sheridan, Illinois - Page 1 of 2

Sample ID	AXTP1BE	AXTP1BE DUP	AXTP1BF	AXTP1BN	AXTP1BS	AXTP1BW	AXTP3E	AXTP3F	AXTP3N	AXTP3S	AXTP3W
Lab ID	21165-005	21165-006	21165-004	21165-003	21165-002	21165-001	21165-009	21165-010	21165-007	21165-011	21165-008
Parameter	Depth	0-6'	6'	0-6'	0-6'	0-6'	0-3.5'	0-3.5'	0-3.8'	0-3.8'	0-3.5'
1-Methylnaphthalene	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
2-Methylnaphthalene	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Acenaphthene	1.5 J	7.5 J	<0.059	0.13	<0.12 UJ	<0.12 UJ	0.42 J	<0.058	0.5 J	0.11	0.15
Acenaphthylene	0.74 J	0.83 J	<0.059	<0.061	0.16 J	0.65 J	0.16 J	<0.058	0.19 J	0.11	0.12
Anthracene	2 J	0.75 J	<0.059	<0.061	0.25 J	0.65 J	0.16 J	<0.058	0.28 J	0.061	0.078
Benzo(a)Anthracene	2.9 J	1.8 J	0.064	0.35	1.2 J	2.9 J	0.88 J	<0.041	1.2 J	0.3	0.31
Benzo(a)Pyrene	7.7 J	4.6 J	<0.042	0.52	1.2 J	3.4 J	1 J	<0.041	1.5 J	0.51	0.49
Benzo(b)Fluoranthene	1.6 J	0.96 J	<0.042	0.29	0.84 J	2 J	1.2 J	<0.041	0.74 J	0.18	0.17
Benzo(g,h,i)Perylene	5 J	2.9 J	<0.059	0.29	0.86 J	2.4 J	0.81 J	<0.058	1 J	0.28	0.17
Benzo(k)Fluoranthene	1.1 J	0.84 J	<0.042	0.12	0.36 J	1.1 J	0.23 J	<0.041	0.42 J	0.1	<0.037
Chrysene	3.6 J	2.1 J	0.049	0.22	0.95 J	1.6 J	0.63 J	<0.041	0.69 J	0.18	0.19
Dibenzo(a,h)Anthracene	1.8 J	1.7 J	<0.059	0.14	0.43 J	<0.12 UJ	0.43 J	<0.058	0.6 J	<0.06	0.11
Fluoranthene	8.8 J	5.4 J	<0.059	0.36	1.6 J	4.5 J	1.1 J	<0.058	1.4 J	0.55	0.58
Fluorene	<0.12 UJ	<0.12 UJ	<0.059	<0.061	<0.12 UJ	<0.12 UJ	<0.11 UJ	<0.058	<0.12 UJ	<0.06	<0.059
Indeno(1,2,3-CD)Pyrene	2.6 J	1.6 J	<0.042	0.16	0.43 J	1.1 J	0.38 J	<0.041	0.5 J	0.18	0.18
Methylene Chloride	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Naphthalene	5.4 J	3.4 J	<0.059	0.11	1 J	4 J	1.1 J	<0.058	1.1 J	0.3	0.29
Phenanthrene	5.8 J	2.3 J	<0.059	0.066	0.63 J	1.8 J	0.49 J	<0.058	0.88 J	0.18	0.24
Pyrene	0.34 J	4.1 J	<0.059	0.38	1.6 J	3.8 J	0.93 J	<0.058	1.2 J	0.21	0.26

n:\data\proj\4902087\p\CSA2Annex\PAH\_HitsOnly.xls



### 3.0 Risk-Based Screening Evaluation

The data obtained from soil Boring B43SB04 and the excavated test pits are used in this report to determine the potential risk associated with this study area, which is to be surplused. To achieve this determination, each datum was evaluated using the risk-based screening process outlined in the Final Revised Final Technical Evaluation Plan (TEP) (ESE, 1996). This section presents the results of this process.

#### 3.1 Data Evaluation Baseline

Prior to actually performing the screening, the issue of duplicate samples was addressed. Duplicate samples were collected for quality control (QC) purposes. In those instances where a constituent was detected in both the primary and the duplicate samples, the concentrations were averaged. The average concentration was then carried through the risk-based screening. In those instances where a constituent was detected in one sample but not the other, the value represented by the detected concentration was used. This concentration was then carried through the risk-based screening. Samples that exceeded the risk-based screening values were incorporated into a relative-risk analysis identical to that used in the Miscellaneous Study Areas DER and Technical Memorandum (QST, 1997a and 1997b).

#### 3.2 CSA Annex Study Area Risk-Based Screening

A total of 19 soil samples were utilized in the risk-based screening process. Duplicate samples were collected from two of the 19 samples. Each of the 19 samples were analyzed for PAHs and three of the 19 samples were analyzed for inorganic constituents. The results of the risk-based screening for the CSA Annex are presented in Table 3-1. Inorganic constituents were not evaluated in the risk-based screening as they have previously been determined to be at background levels (QST, 1997a and 1997b). In Table 3-1, the terms "fail" and "pass" are used to describe the results of the screening. The term "fail" indicates that the constituent concentration is above or exceeds the risk-based screening value. The term "pass" indicates that the constituent concentration is lower than or falls below the risk-based screening value.

PAH constituents exceed the risk-based screening values in 15 of the 19 samples collected. Benzo(a)pyrene is the most common PAH exceeding the risk-based screening value with 15 exceedences. Dibenzo(a,h)anthracene is the second most common PAH exceeding the risk-based screening value with 12 exceedences followed by 11 benzo(a)anthracene and benzo(b)fluoranthene exceedences.



Indeno(1,2,3-cd)pyrene exceeded the risk-based screening value with six exceedences. The screening criteria used are USEPA Region IX Preliminary Remediation Goals (PRGs).

### 3.3 Risk Evaluation

Results of the CSA Annex risk calculations are presented in Table 3-2. These results indicate that the  $RS_{\alpha}$  associated with the CSA Annex study area samples is  $1E-04$ . The principle components of the  $RS_{\alpha}$  are benzo(a)pyrene with an  $RS_c$  of  $6E-05$  (60 percent of the  $RS_{\alpha}$ ), benzo(a)anthracene with an  $RS_c$  of  $2E-05$  (20 percent of the  $RS_{\alpha}$ ), and dibenzo(a)anthracene with an  $RS_c$  of  $2E-05$  (20 percent of the  $RS_{\alpha}$ ). The  $RS_{\alpha}$  of  $1E-04$  for the CSA Annex is based on residential risk-based screening values, which, in accordance with the approved Fort Sheridan Concept Plan [Johnson, Johnson and Roy, Inc. (JJR), 1994], are appropriate for the future use of this study area.

Table 3-1. Results of CSA Annex Risk-Based Screening, Surplus OU, Fort Sheridan, Illinois - Page 1 of 8

Site ID	Lab ID	Constituent	Concentration (mg/kg)	Screening Value (mg/kg)	Source of Screening Value	Pass Or Fail	Comments
<b>AXTP1BE</b>							
	21165-005/006	Acenaphthene	4.5*	2.9e+03	TACO	Pass	TACO Table A - Class II
	21165-005/006	Acenaphthylene	0.785*	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-005/006	Anthracene	1.375*	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-005/006	Benzo(a)Anthracene	2.35*	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-005/006	Benzo(a)Pyrene	6.15*	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-005/006	Benzo(b)Fluoranthene	1.28*	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-005/006	Benzo(g,h,i)Perylene	3.95*	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-005/006	Benzo(k)Fluoranthene	0.97*	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-005/006	Chrysene	2.85*	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-005/006	Dibenzo(a,h)Anthracene	1.75*	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-005/006	Fluoranthene	7.1*	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-005/006	Indeno(1,2,3-CD)Pyrene	2.1*	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-005/006	Naphthalene	4.4*	4.2e+02	TACO	Pass	TACO Table A - Class II
	21165-005/006	Phenanthrene	4.05*	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-005/006	Pyrene	2.22*	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
<b>AXTP1BF</b>							
	21165-004	Benzo(a)Anthracene	0.064	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-004	Chrysene	0.049	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
<b>AXTP1BN</b>							
	21165-003	Acenaphthene	0.13	2.9e+03	TACO	Pass	TACO Table A - Class II
	21165-003	Benzo(a)Anthracene	0.35	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-003	Benzo(a)Pyrene	0.52	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-003	Benzo(b)Fluoranthene	0.29	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-003	Benzo(g,h,i)Perylene	0.29	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-003	Benzo(k)Fluoranthene	0.12	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-003	Chrysene	0.22	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-003	Dibenzo(a,h)Anthracene	0.14	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-003	Fluoranthene	0.36	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-003	Indeno(1,2,3-CD)Pyrene	0.16	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-003	Naphthalene	0.11	4.2e+02	TACO	Pass	TACO Table A - Class II
	21165-003	Phenanthrene	0.066	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-003	Pyrene	0.38	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96

n:\data\4902087\461\CSA2\Innest\CSA2 Annex.pbl.table\_3-1 CSA2Annex.dbf

Table 3-1. Results of CSA Annex Risk-Based Screening, Surplus OU, Fort Sheridan, Illinois - Page 2 of 8

Site ID	Lab ID	Constituent	Concentration (mg/kg)	Screening Value (mg/kg)	Source of Screening Value	Pass Or Fail	Comments
<b>AXTP1BS</b>							
21165-002		Acenaphthylene	0.16	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-002		Anthracene	0.25	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-002		Benzo(a)Anthracene	1.2	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-002		Benzo(a)Pyrene	1.2	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-002		Benzo(b)Fluoranthene	0.84	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-002		Benzo(g,h,i)Perylene	0.86	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-002		Benzo(k)Fluoranthene	0.36	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-002		Chrysene	0.95	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-002		Dibenzo(a,h)Anthracene	0.43	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-002		Fluoranthene	1.6	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-002		Indeno(1,2,3-CD)Pyrene	0.43	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-002		Naphthalene	1	4.2e+02	TACO	Pass	TACO Table A - Class II
21165-002		Phenanthrene	0.63	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-002		Pyrene	1.6	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
<b>AXTP1BW</b>							
21165-001		Acenaphthylene	0.65	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-001		Anthracene	0.65	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-001		Benzo(a)Anthracene	2.9	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-001		Benzo(a)Pyrene	3.4	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-001		Benzo(b)Fluoranthene	2	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-001		Benzo(g,h,i)Perylene	2.4	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-001		Benzo(k)Fluoranthene	1.1	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-001		Chrysene	1.6	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-001		Fluoranthene	4.5	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-001		Indeno(1,2,3-CD)Pyrene	1.1	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-001		Naphthalene	4	4.2e+02	TACO	Pass	TACO Table A - Class II
21165-001		Phenanthrene	1.8	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-001		Pyrene	3.8	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
<b>AXTP3E</b>							
21165-009		Acenaphthylene	0.42	2.9e+03	TACO	Pass	TACO Table A - Class II
21165-009		Anthracene	0.16	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-009		Anthracene	0.16	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96

n:\data\4902087\OU1\CSA2Annex\CSA2\_Annex.pbl.table\_3-1 CSA2Annex.dbf

Table 3-1. Results of CSA Annex Risk-Based Screening, Surplus OU, Fort Sheridan, Illinois - Page 3 of 8

Site ID	Lab ID	Constituent	Concentration (mg/kg)	Screening Value (mg/kg)	Source of Screening Value	Pass Or Fail	Comments
<b>AXTP3E</b>							
21165-009		Benzo(a)Anthracene	0.88	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-009		Benzo(a)Pyrene	1	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-009		Benzo(b)Fluoranthene	1.2	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-009		Benzo(g,h,i)Perylene	0.81	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-009		Benzo(k)Fluoranthene	0.23	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-009		Chrysene	0.63	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-009		Dibenzo(a,h)Anthracene	0.43	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-009		Fluoranthene	1.1	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-009		Indeno(1,2,3-CD)Pyrene	0.38	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-009		Naphthalene	1.1	4.2e+02	TACO	Pass	TACO Table A - Class II
21165-009		Phenanthrene	0.49	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-009		Pyrene	0.93	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
<b>AXTP3N</b>							
21165-007		Acenaphthene	0.5	2.9e+03	TACO	Pass	TACO Table A - Class II
21165-007		Acenaphthylene	0.19	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-007		Anthracene	0.28	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-007		Benzo(a)Anthracene	1.2	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-007		Benzo(a)Pyrene	1.5	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-007		Benzo(b)Fluoranthene	0.74	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-007		Benzo(g,h,i)Perylene	1	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-007		Benzo(k)Fluoranthene	0.42	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-007		Chrysene	0.69	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-007		Dibenzo(a,h)Anthracene	0.6	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
21165-007		Fluoranthene	1.4	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-007		Indeno(1,2,3-CD)Pyrene	0.5	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
21165-007		Naphthalene	1.1	4.2e+02	TACO	Pass	TACO Table A - Class II
21165-007		Phenanthrene	0.88	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-007		Pyrene	1.2	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
<b>AXTP3S</b>							
21165-011		Acenaphthene	0.11	2.9e+03	TACO	Pass	TACO Table A - Class II
21165-011		Acenaphthylene	0.11	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
21165-011		Anthracene	0.061	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96

n:\data\4902087\db\CSA24\mex\CSA2\_Annex.pbl\table\_3-1\_CSA24mex.dbf

Table 3-1. Results of CSA Annex Risk-Based Screening, Surplus OU, Fort Sheridan, Illinois - Page 4 of 8

Site ID	Lab ID	Constituent	Concentration (mg/kg)	Screening Value (mg/kg)	Source of Screening Value	Pass Or Fail	Comments
AXTP3S							
	21165-011	Benzo(a)Anthracene	0.3	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-011	Benzo(a)Pyrene	0.51	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-011	Benzo(b)Fluoranthene	0.18	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-011	Benzo(g,h,i)Perylene	0.28	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-011	Benzo(k)Fluoranthene	0.1	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-011	Chrysene	0.18	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-011	Fluoranthene	0.55	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-011	Indeno(1,2,3-CD)Pyrene	0.18	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-011	Naphthalene	0.3	4.2e+02	TACO	Pass	TACO Table A - Class II
	21165-011	Phenanthrene	0.18	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-011	Pyrene	0.21	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
AXTP3W							
	21165-008	Acenaphthene	0.15	2.9e+03	TACO	Pass	TACO Table A - Class II
	21165-008	Acenaphthylene	0.12	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-008	Anthracene	0.078	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-008	Benzo(a)Anthracene	0.31	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-008	Benzo(a)Pyrene	0.49	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-008	Benzo(b)Fluoranthene	0.17	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-008	Benzo(g,h,i)Perylene	0.17	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-008	Chrysene	0.19	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-008	Dibenzo(a,h)Anthracene	0.11	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-008	Fluoranthene	0.58	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-008	Indeno(1,2,3-CD)Pyrene	0.18	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-008	Naphthalene	0.29	4.2e+02	TACO	Pass	TACO Table A - Class II
	21165-008	Phenanthrene	0.24	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-008	Pyrene	0.26	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
AXTP4E							
	21165-015	Acenaphthene	0.89	2.9e+03	TACO	Pass	TACO Table A - Class II
	21165-015	Acenaphthylene	0.69	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-015	Anthracene	0.5	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-015	Benzo(a)Anthracene	1.4	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-015	Benzo(a)Pyrene	1.5	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96

n:\data\4902087\dlb\CSA2\Annex\CSA2\_Annex.ppt, table\_3-1 CSA2Annex.dbf

Table 3-1. Results of CSA Annex Risk-Based Screening, Surplus OU, Fort Sheridan, Illinois - Page 5 of 8

Site ID	Lab ID	Constituent	Concentration (mg/kg)	Screening Value (mg/kg)	Source of Screening Value	Pass Or Fail	Comments
<b>AXTP4E</b>							
	21165-015	Benzo(b)Fluoranthene	1.6	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-015	Benzo(g,h,i)Perylene	1.1	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-015	Benzo(k)Fluoranthene	0.43	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-015	Chrysene	0.69	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-015	Dibenzo(a,h)Anthracene	0.69	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-015	Fluoranthene	2.6	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-015	Indeno(1,2,3-CD)Pyrene	0.49	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-015	Naphthalene	1.9	4.2e+02	TACO	Pass	EPA Region IX PRGs, 8/1/96
	21165-015	Phenanthrene	1.6	2.0e+03	PRG	Pass	TACO Table A - Class II
	21165-015	Pyrene	1.1	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
<b>AXTP4F</b>							
	21165-016	Benzo(a)Anthracene	0.055	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-016	Chrysene	0.044	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
<b>AXTP4N</b>							
	21165-014	Acenaphthene	1.8	2.9e+03	TACO	Pass	TACO Table A - Class II
	21165-014	Acenaphthylene	1.1	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-014	Anthracene	0.64	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-014	Benzo(a)Anthracene	1.8	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-014	Benzo(a)Pyrene	2.5	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-014	Benzo(b)Fluoranthene	2	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-014	Benzo(g,h,i)Perylene	1.7	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-014	Benzo(k)Fluoranthene	0.52	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-014	Chrysene	0.98	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-014	Dibenzo(a,h)Anthracene	1.1	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-014	Fluoranthene	3.8	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-014	Indeno(1,2,3-CD)Pyrene	0.77	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-014	Naphthalene	2.8	4.2e+02	TACO	Pass	TACO Table A - Class II
	21165-014	Phenanthrene	1.9	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-014	Pyrene	1.1	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
<b>AXTP4S</b>							
	21165-012/013	Acenaphthene	0.705*	2.9e+03	TACO	Pass	TACO Table A - Class II

n:\data\4902087\db\CSA12Annex\CSA12\_Annex.pbl\table\_3-1\_CSA12Annex.dbf

Table 3-1. Results of CSA Annex Risk-Based Screening, Surplus OU, Fort Sheridan, Illinois - Page 6 of 8

Site ID	Lab ID	Constituent	Concentration (mg/kg)	Screening Value (mg/kg)	Source of Screening Value	Pass Or Fail	Comments
<b>AXTP4S</b>							
	21165-012/013	Acenaphthylene	0.64*	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-012/013	Anthracene	0.18*	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-012/013	Benzo(a)Anthracene	0.71*	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-012/013	Benzo(a)Pyrene	0.915*	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-012/013	Benzo(b)Fluoranthene	0.625*	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-012/013	Benzo(g,h,i)Perylene	0.68*	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-012/013	Benzo(k)Fluoranthene	0.13*	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-012/013	Chrysene	0.365*	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-012/013	Dibenzo(a,h)Anthracene	0.233*	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-012/013	Fluoranthene	1.15*	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-012/013	Indeno(1,2,3-CD)Pyrene	0.345*	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-012/013	Naphthalene	0.945*	4.2e+02	TACO	Pass	EPA Region IX PRGs, 8/1/96
	21165-012/013	Phenanthrene	0.54*	2.0e+03	PRG	Pass	TACO Table A - Class II
	21165-012/013	Pyrene	0.38*	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
<b>AXTP4W</b>							
	21165-017	Acenaphthene	0.58	2.9e+03	TACO	Pass	TACO Table A - Class II
	21165-017	Acenaphthylene	0.85	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-017	Benzo(a)Anthracene	0.28	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-017	Benzo(a)Pyrene	0.57	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-017	Benzo(b)Fluoranthene	0.18	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-017	Benzo(g,h,i)Perylene	0.31	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-017	Benzo(k)Fluoranthene	0.091	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-017	Chrysene	0.16	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-017	Fluoranthene	0.5	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-017	Indeno(1,2,3-CD)Pyrene	0.2	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-017	Naphthalene	0.41	4.2e+02	TACO	Pass	EPA Region IX PRGs, 8/1/96
	21165-017	Phenanthrene	0.2	2.0e+03	PRG	Pass	TACO Table A - Class II
	21165-017	Pyrene	0.72	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
<b>AXTP5E</b>							
	21165-022	Acenaphthene	2.8	2.9e+03	TACO	Pass	TACO Table A - Class II
	21165-022	Acenaphthylene	0.58	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-022	Anthracene	3.7	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96

n:\data\1902087\dl\CSA2\Innes\CSA2\_Annex.pbl.table\_3-1\_CSA2Inns.dbf

Table 3-1. Results of CSA Annex Risk-Based Screening, Surplus OU, Fort Sheridan, Illinois - Page 7 of 8

Site ID	Lab ID	Constituent	Concentration (mg/kg)	Screening Value (mg/kg)	Source of Screening Value	Pass Or Fail	Comments
AXTP5E							
	21165-022	Benzo(a)Anthracene	9.5	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-022	Benzo(a)Pyrene	9.3	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-022	Benzo(b)Fluoranthene	8.2	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-022	Benzo(g,h,i)Perylene	4.3	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-022	Benzo(k)Fluoranthene	3	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-022	Chrysene	6	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-022	Dibenzo(a,h)Anthracene	2.4	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-022	Fluoranthene	14	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-022	Fluorene	0.48	2.5e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-022	Indeno(1,2,3-CD)Pyrene	2.6	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-022	Naphthalene	3.3	4.2e+02	TACO	Pass	TACO Table A - Class II
	21165-022	Phenanthrene	7	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-022	Pyrene	12	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
AXTP5N							
	21165-021	Acenaphthene	3.5	2.9e+03	TACO	Pass	TACO Table A - Class II
	21165-021	Anthracene	2.6	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-021	Benzo(a)Anthracene	5.9	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-021	Benzo(a)Pyrene	8.8	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-021	Benzo(b)Fluoranthene	5.3	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-021	Benzo(g,h,i)Perylene	5.2	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-021	Benzo(k)Fluoranthene	2.2	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-021	Chrysene	3.9	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-021	Dibenzo(a,h)Anthracene	2.6	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-021	Fluoranthene	10	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	21165-021	Indeno(1,2,3-CD)Pyrene	2.8	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	21165-021	Naphthalene	3.6	4.2e+02	TACO	Pass	TACO Table A - Class II
	21165-021	Phenanthrene	3.3	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	21165-021	Pyrene	8	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
B43SB04							
	NP2SB*69	1-Methylnaphthalene	9.6	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*69	2-Methylnaphthalene	25	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	NP2SB*69	Acenaphthene	30	2.9e+03	TACO	Pass	TACO Table A - Class II

n:\data\4902087\d\CSA12\Annex\CSA12 Annex.tbl, table 3-1 CSA12Annex.dbf



Table 3-1. Results of CSA Annex Risk-Based Screening, Surplus OU, Fort Sheridan, Illinois - Page 8 of 8

Site ID	Lab ID	Constituent	Concentration (mg/kg)	Screening Value (mg/kg)	Source of Screening Value	Pass Or Fail	Comments
B43SB04							
	NP2SB*69	Acenaphthylene	3	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	NP2SB*69	Anthracene	32	1.9e+04	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Benzo(a)anthracene	7	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Benzo(a)pyrene	7.6	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Benzo(b)fluoranthene	8	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Benzo(g,h,i)perylene	4	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	NP2SB*69	Benzo(k)fluoranthene	5	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Chrysene	8	6.1e+01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Dibenzo(a,h)anthracene	1.8	6.1e-02	PRG	Fail	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Fluoranthene	14	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Fluorene	2.5	2.5e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Indeno(1,2,3-cd)pyrene	4	6.1e-01	PRG	Fail	EPA Region IX PRGs, 8/1/96
	NP2SB*69	Naphthalene	12	4.2e+02	TACO	Pass	TACO Table A - Class II
	NP2SB*69	Phenanthrene	16	2.0e+03	PRG	Pass	PRGs for most toxic non-naphthalene PAH (pyrene)
	NP2SB*69	Pyrene	14	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*70	Benzo(a)anthracene	0.00329	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*70	Benzo(a)pyrene	0.003	6.1e-02	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*70	Benzo(b)fluoranthene	0.00427	6.1e-01	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*70	Benzo(k)fluoranthene	0.00201	6.1e+00	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*70	Fluoranthene	0.00555	2.6e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*70	Pyrene	0.0142	2.0e+03	PRG	Pass	EPA Region IX PRGs, 8/1/96
	NP2SB*71	Methylene chloride	0.013	2.0e-01	TACO	Pass	TACO Table A - Class II

n:\data\4902087\db\CSA2\Annex\CSA2\_Annex.pbl.table\_3-1 (CSA2Annex.dbf)

PRG = Preliminary Remediation Goal

SSL = Soil Screening Level

TACO = Tiered Approach for Soil Cleanup Objectives

mg/kg = Milligrams per kilogram

\* = Value is averaged with duplicate

n:\data\4902087\db\CSA2\Annex\CSA2\_Annex.pbl.table\_3-1 (CSA2Annex.dbf)

**Table 3-2. Carcinogenic Risks for the CSA Annex, Fort Sheridan, Illinois**

Constituent	UCL or Maximum Concentration Detected* (mg/kg)	Carcinogenic Screening Value (mg/kg)	Individual Carcinogenic Risk
Benzo(a)anthracene	9.5	6.1e-01	2e-05
Benzo(a)pyrene	3.49**	6.1e-02	6e-05
Benzo(b)fluoranthene	8.2	6.1e-01	1e-05
Dibenzo(a,h)anthracene	0.951**	6.1e-02	2e-05
Indeno(1,2,3-cd)pyrene	4	6.1e-01	7e-06
<b>Cumulative Risk</b>			<b>1e-04</b>

n:\data\proj\4902087\db\CSA2Annex\CSA2\_Annex.pbl.table 3-2 (Annex\_RR.dbf)

UCL = 95 percent Upper Confidence Limit of the mean concentration

mg/kg = Milligrams per kilogram

\* = The lower of the UCL or maximum concentration is used.

\*\* = Value listed is the UCL for the constituent

## 4.0 Conclusions and Recommendations

The  $RS_{\alpha}$  of  $1E-04$  for the CSA Annex study area is at the upper end of USEPA's target risk range. Although the use of generic, conservative risk-based screening values to calculate the risk likely results in an overestimation of the potential risks, the widespread presence of coal at the study area (about 4 feet thick in one test pit) and the consistently elevated levels of PAHs detected in the samples, indicates a strong potential for unacceptable risks to future residents. Coal was open-air stockpiled in the general area and was used to supply fuel for industrial heating purposes at Fort Sheridan. Therefore, a removal action is recommended for the CSA Annex study area.

## 5.0 References


- Argonne National Laboratory (ANL). 1989. Enhanced Preliminary Assessment Report, Fort Sheridan. Fort Sheridan, Illinois. Prepared for U.S. Army Toxic and Hazardous Materials Agency; Aberdeen Proving Ground, Maryland.
- Environmental Science and Engineering, Inc. (ESE). 1996. Final Revised Final Technical Evaluation Plan, Fort Sheridan RI/FS Data Evaluation Procedures: Use of Background Data. Prepared for U.S. Army Environmental Center, Aberdeen Proving Ground, Maryland.
- Environmental Science & Engineering, Inc. (ESE). 1995. Final Overall Quality Assurance Program Plan Remedial Investigation/Feasibility Study Fort Sheridan, Illinois, ESE No. 490-2087-0110; Prepared for U.S. Army Environmental Center.
- Gross, D., R.L. Muhly, H.K. Woods, R.L. Yon, D.J. Wenz, J.D. Wienand, and N.P. Leibel. 1982. Installation Assessment of Fort Sheridan and Joliet Training Area, Illinois; prepared for U.S. Army Toxic and Hazardous Materials Agency; Aberdeen Proving Ground, Maryland.
- International Technology Corporation (IT). 1999. Draft Non-Time-Critical Removal Action Completion Report: Building 42, Building 43, Coal Storage Area 3, and Building 77. Fort Sheridan, Illinois. Prepared for U.S. Army Corps of Engineers, Louisville District.
- Johnson, Johnson, and Roy, Inc. (JJR). 1994. Fort Sheridan Concept Plan. Fort Sheridan Joint Planning Committee, Lake Forest, Illinois.
- Melichar, Paul. 1995. Solving the Puzzles of St. Johns (Parts 1-5). The Tower. published by Fort Sheridan Historic Preservation Society.
- QST Environmental Inc. (QST). 1999. Sampling and Analysis Plan, Coal Storage Area 2 Annex, Fort Sheridan, Illinois. Contained in letter dated April 13, 1999.
- QST Environmental Inc. (QST). 1997a. Final Sampling Results and Data Evaluation Report for Miscellaneous Surplus Operable Unit Study Areas, Fort Sheridan, Illinois. Prepared for U.S. Army Environmental Center, Aberdeen Proving Ground, Maryland.
- QST Environmental Inc. (QST). 1997b. Final Technical Memorandum for Miscellaneous Surplus Operable Unit Study Areas, Fort Sheridan, Illinois. Prepared for U.S. Army Environmental Center, Aberdeen Proving Ground, Maryland.
- U.S. Environmental Protection Agency (USEPA). 1994. National Functional Guidelines for Organic Data Review.

## **Appendix A**

### **Test Pit Logs**


# FORT SHERIDAN

## TEST PIT CSA2AX TPOIB

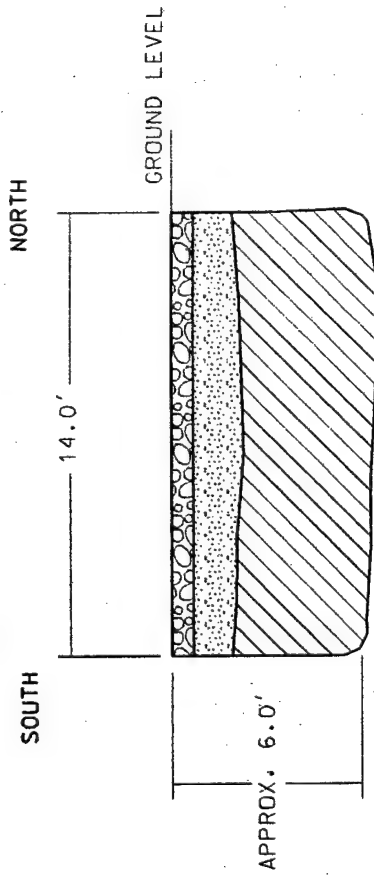


WEST WALL


HORIZONTAL SCALE: 1" = 6'  
VERTICAL SCALE: 1" = 6'

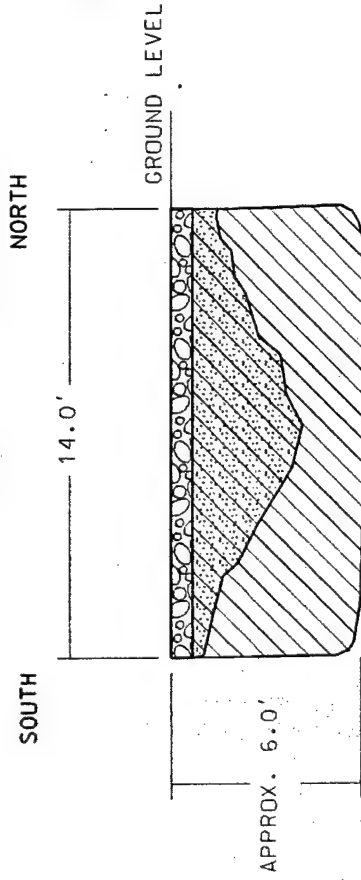

EAST WALL



NORTH WALL

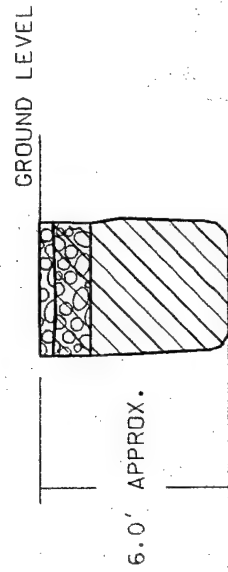

SOUTH WALL

HORIZONTAL SCALE: 1" = 6'  
VERTICAL SCALE: 1" = 6'

### LEGEND



COAL FILL/  
MIXED WITH CLAY FILL



GRAVEL  
FILL



COAL/  
CINDER FILL



NATIVE/CLAY







CLAY/  
GRAVEL FILL

Date completed: 4/21/1999

na:\9208\proj\user\3166\TPOIB.dgn

# FORT SHERIDAN

## TEST PIT CSA2AX TPO3

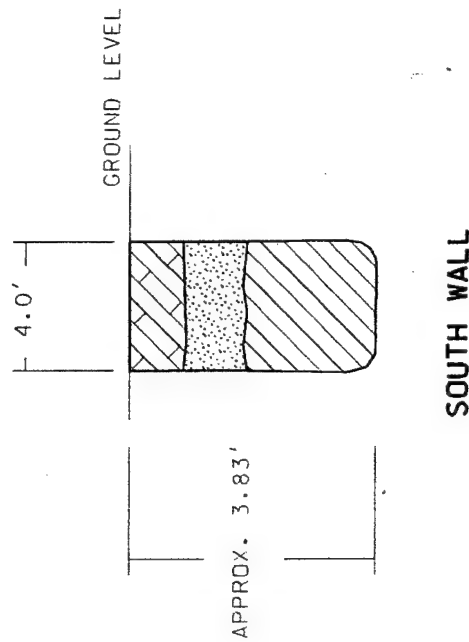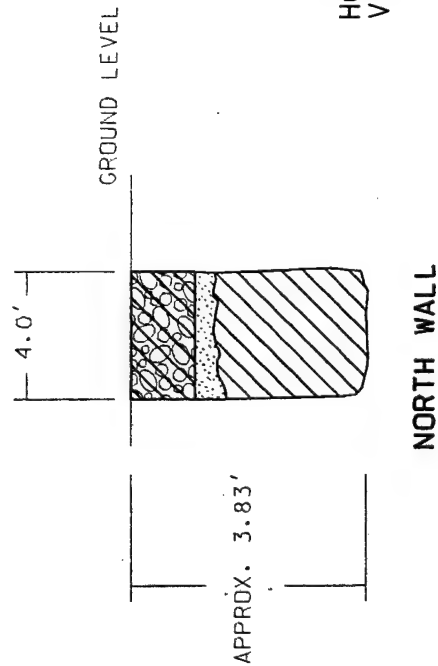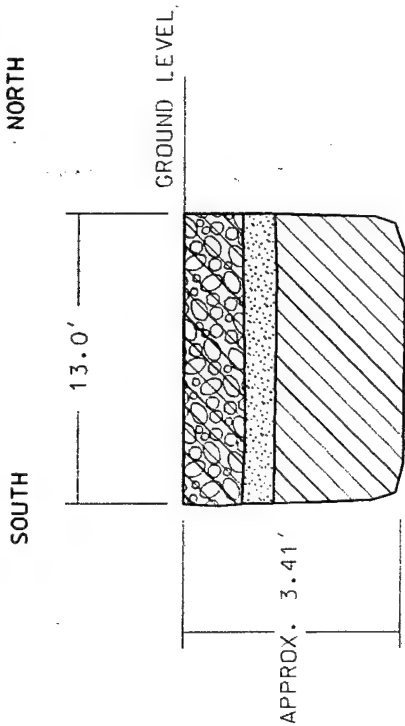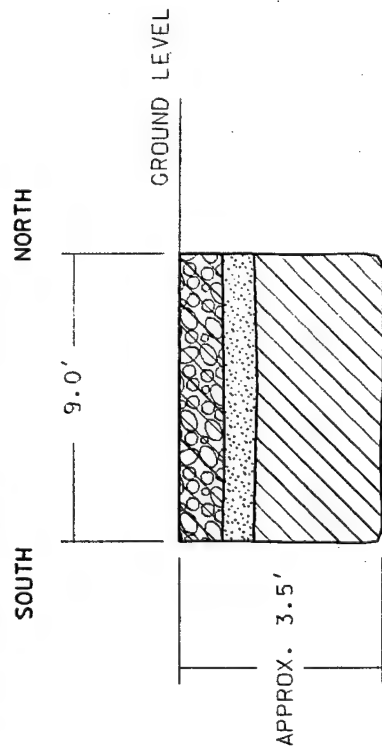

### LEGEND


- COAL/CINDER FILL
- NATIVE CLAY
- CLAY/ GRAVEL FILL
- CLAY FILL

Date completed: 4/21/1999



m:\9202087\proj\dm\tpo3\tdgm

# FORT SHERIDAN


## TEST PIT CSA2AX TP04

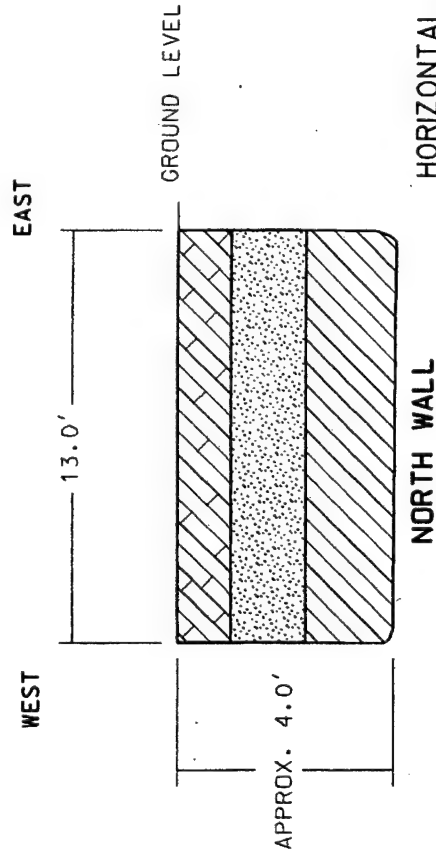

HORIZONTAL SCALE: 1" = 6'  
VERTICAL SCALE: 1" = 3'

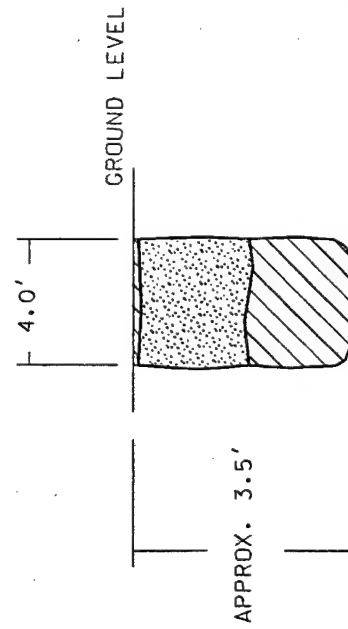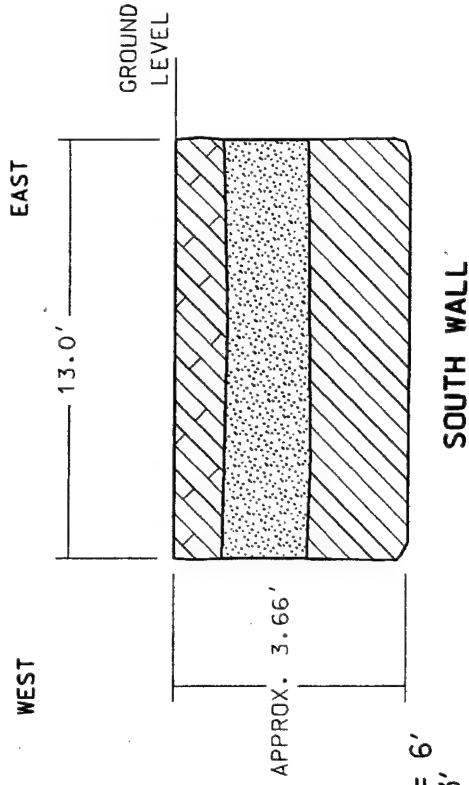

HORIZONTAL SCALE: 1" = 6'  
VERTICAL SCALE: 1" = 3'

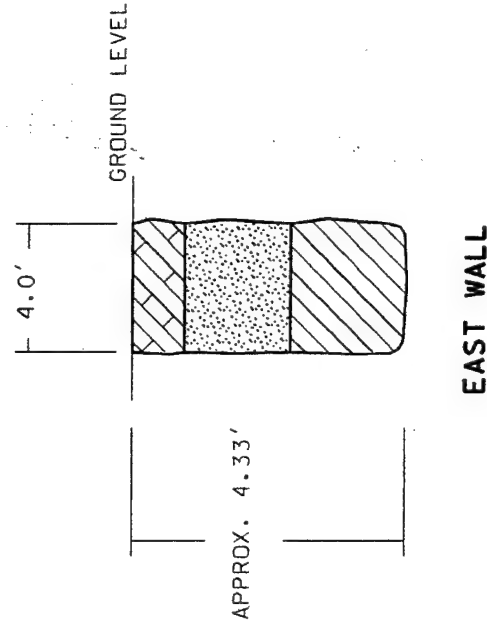

### LEGEND

-  COAL/  
CINDER FILL
-  NATIVE/CLAY
-  GREY BROWN  
CLAY


Date completed: 4/21/1999

7614502007 v001 v01m1p04d1gm



# FORT SHERIDAN


# TEST PIT CSA2AX TP05

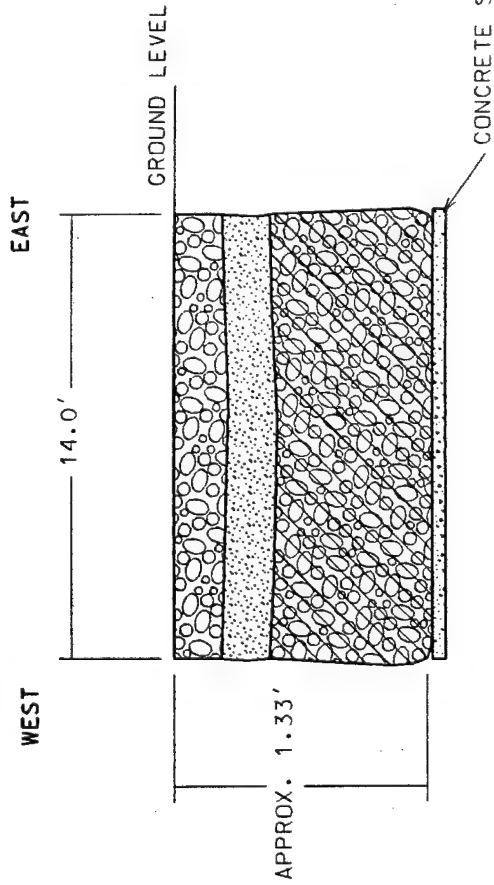

## NORTH WALL

HORIZONTAL SCALE: 1" = 6'

VERTICAL SCALE: 1" = 1'

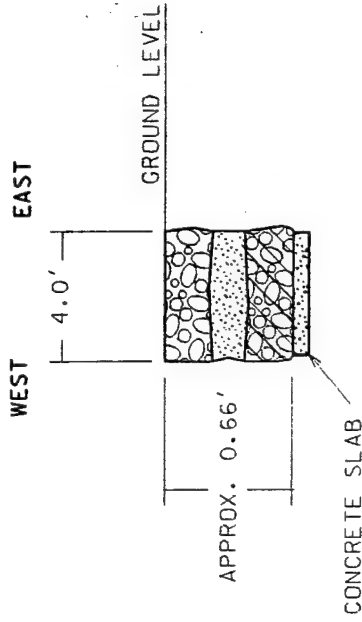

## EAST WALL

HORIZONTAL SCALE: 1" = 6'

VERTICAL SCALE: 1" = 1'

## LEGEND



GRAVEL



COAL/  
CINDER FILL



CLAY/  
GRAVEL FILL

Date completed: 4/21/1999

m:\902087\p05\user\3165\TP05.dgn

## **Appendix B**

### **Analytical Data Sheets**

Quanterra Incorporated  
13715 Rider Trail North  
Earth City, Missouri 63045

314 298-8566 Telephone  
314 298-8757 Fax

## CASE NARRATIVE

QST  
11665 Lilburne Park Road.  
St. Louis, Mo. 63146

April 30, 1999

Attention: Ms. Debbie McKinley

---

Quanterra Project Number	: 833.02
SDG Number	: 21165
Date Received	: April 22, 1999
Number of Samples	: Twenty-two (22)
Sample type	: Soil

---

### INTRODUCTION

Twenty-two (22) soil samples from QST were received at Quanterra Environmental Services. Earth City, MO for PAH analysis. The list of analytical tests performed, as well as date of receipt and analysis, can be found in the attached report.

Reviewed and Approved



---

Ron Swaller  
Quanterra Project Manager

PAGE 2 of 4

April 30, 1999

Quanterra Project Number : 833.02

The samples were labeled as follows:

<u>CLIENT ID</u>	<u>LAB ID</u>	<u>MATRIX</u>
AXTP1BW	21165-001	Soil
AXTP1BW	21165-001MS	Soil
AXTP1BW	21165-001MSD	Soil
AXTP1BS	21165-002	Soil
AXTP1BN	21165-003	Soil
AXTP1BF	21165-004	Soil
AXTP1BE	21165-005	Soil
AXTP1BE DUP	21165-006	Soil
AXTP3N	21165-007	Soil
AXTP3W	21165-008	Soil
AXTP3E	21165-009	Soil
AXTP3F	21165-010	Soil
AXTP3S	21165-011	Soil
AXTP4S	21165-012	Soil
AXTP4S DUP	21165-013	Soil
AXTP4N	21165-014	Soil
AXTP4E	21165-015	Soil
AXTP4F	21165-016	Soil
AXTP4W	21165-017	Soil
CSA3SDW2	21165-018	Soil
CSA3SDW1	21165-019	Soil
CSA3W3	21165-020	Soil
AXTP5N	21165-021	Soil
AXTP5E	21165-022	Soil

#### ANALYTICAL RESULTS/METHODOLOGY

The analytical results are presented by analytical test in the attached packages and summary reports. This report includes information on client identification numbers, lab identification numbers, preparation date, analysis date, results, units, and results for quality control samples.

The following table is a list of the analyses requested, and the methods used for the above samples:

<u>Analysis</u>	<u>Method</u>
PAH	EPA 8310
Percent Moisture	ITAS/SOP

PAGE 3 of 4

April 30, 1999

Quanterra Project Number : 833.02

---

### QUALITY CONTROL

Method blanks, laboratory control samples, matrix spike, and matrix spike duplicate were analyzed for each parameter listed above.

### NONCONFORMANCES

#### PAH

Batch QC (MS/MSD) was extracted on one set of samples and was not performed on QST's 2<sup>nd</sup> batch of samples. A LCS and blank was associated with both batches. Quanterra is providing QC (MS/MSD) data on an additional batch extracted on the same day and analyzed under the same calibration per the clients request. A PAH addendum data package was provided.

### COMMENTS

#### PAH

The MS/MSD was out of control limits due to a dilution being made because of hits in the sample.

### Receipt

The samples were received at 5°C. Sample CSA3SDW3 on chain of custody read as CSA3W3 on the sample lid an was logged in as such.

### QUALIFIERS

*	= Values reported outside the QC limits.
B	= Value greater than IDL but less than CRDL (Metals only)
B	= Analyte found in the blank,(Organics only)
CRDL	= Customer Required Detection Limit
DL	= PQL
D	= Diluted
E	= Exceeds calibration
IDL	= Instrument detection limit
J	= Estimated Value (Organics only)
MDA	= Minimal detectable activity
MG/L	= Milligrams per liter
MG/KG	= Milligrams per kilogram
NA	= Not applicable
NC	= No criteria at this time

PAGE 4 of 4

April 30, 1999

Quanterra Project Number : 833.02

---

**QUALIFIERS-continued**

ND	= Non - detect
PCI/L	= Picocuries per liter
PCI/G	= Picocuries per gram
U	= Non - Detect
UG/L	= Micrograms per liter
UG/G	= Micrograms per gram
UG/KG	= Micrograms per kilogram
RPD	= Relative Percent Difference
%REC	= Percent Recovery
QCBLK	= Method Blank
QCLCS	= Laboratory Control Sample



Quanterra  
April 30, 1999 09:57 am  
Percent Solids

QST Environmental  
11655 Lilburne Prk Road

St. Louis, MO 63146

Project Number: 833.02

Category: Percent Solids

Method : SL 4005

Sample Date : 21-APR-99

Received Date: 22-APR-99

Report Date : 30-APR-99

Client ID	Login No	Matrix	Decant Type	Prep Date	Percent Solids	Percent Moisture
AXTP1BW	21165-001	Soil	N	23-APR-99	82.76	17.24
AXTP1BS	21165-002	Soil	N	23-APR-99	84.85	15.15
AXTP1BN	21165-003	Soil	N	23-APR-99	80.78	19.22
AXTP1BF	21165-004	Soil	N	23-APR-99	83.41	16.59
AXTP1BE	21165-005	Soil	N	23-APR-99	80.17	19.83
AXTP1BE DUP	21165-006	Soil	N	23-APR-99	82.16	17.84
AXTP3N	21165-007	Soil	N	23-APR-99	84.42	15.58
AXTP3W	21165-008	Soil	N	23-APR-99	84.25	15.75
AXTP3E	21165-009	Soil	N	23-APR-99	86.75	13.25
AXTP3F	21165-010	Soil	N	23-APR-99	85.22	14.78
AXTP3S	21165-011	Soil	N	23-APR-99	82.36	17.64
AXTP4S	21165-012	Soil	N	23-APR-99	85.92	14.08
AXTP4S DUP	21165-013	Soil	N	23-APR-99	86.54	13.46
AXTP4N	21165-014	Soil	N	23-APR-99	85.86	14.14
AXTP4E	21165-015	Soil	N	23-APR-99	85.53	14.47
AXTP4F	21165-016	Soil	N	23-APR-99	83.48	16.52
AXTP4W	21165-017	Soil	N	23-APR-99	84.94	15.06
CSA3SDW2	21165-018	Soil	N	23-APR-99	94.19	5.81
CSA3SDW1	21165-019	Soil	N	23-APR-99	89.29	10.71
CSA3W3	21165-020	Soil	N	23-APR-99	87.77	12.23

Quanterra  
April 30, 1999 09:57 am  
Percent Solids



QST Environmental  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project Number: 833.02

Category: Percent Solids

Method : SL 4005

Sample Date : 21-APR-99  
Received Date: 22-APR-99  
Report Date : 30-APR-99

---

Client ID	Login No	Matrix	Decant Type	Prep Date	Percent Solids	Percent Moisture
AXTP5N	21165-021	Soil	N	23-APR-99	84.31	15.69
AXTP5E	21165-022	Soil	N	23-APR-99	85.75	14.25

---





QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTPlBW

Quanterra ID : 21165-001

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection	
							Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	4000 UG/KG		120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	650 UG/KG		120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	120 UG/KG	U	120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120 UG/KG	U	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	1800 UG/KG		120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	650 UG/KG		120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	4500 UG/KG		120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	3800 UG/KG		120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	2900 UG/KG		84	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	1600 UG/KG		84	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	2000 UG/KG		84	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		84	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	3400 UG/KG		84	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	120 UG/KG	U	120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	2400 UG/KG		120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		84	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	467 %REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BW

Quanterra ID : 21165-001MS

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	-835	%REC	*		10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	-162	%REC	*		10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	185	%REC	*		10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	0	%REC	*		10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	-310	%REC	*		10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	-92	%REC	*		10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	-825	%REC	*		10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	-675	%REC	*		10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	-450	%REC	*		10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	-200	%REC	*		10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	-300	%REC	*		10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	-175	%REC	*		10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	-550	%REC	*		10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	275	%REC	*		10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	-385	%REC	*		10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	-172	%REC	*		10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	119	%REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTPLBW

Quanterra ID : 21165-001MSD

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	-25	%REC	*		10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	138	%REC	*		10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	1675	%REC	*		10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	118	%REC	*		10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	200	%REC	*		10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	88	%REC	*		10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	275	%REC	*		10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	-125	%REC	*		10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	125	%REC	*		10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	250	%REC	*		10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	0	%REC	*		10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	75	%REC	*		10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	425	%REC	*		10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	250	%REC	*		10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	250	%REC	*		10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	150	%REC	*		10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	338	%REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BS

Quanterra ID : 21165-002

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1000	UG/KG		120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	160	UG/KG		120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	U	120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	U	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	630	UG/KG		120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	250	UG/KG		120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	1600	UG/KG		120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	1600	UG/KG		120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1200	UG/KG		82	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	950	UG/KG		82	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	840	UG/KG		82	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	360	UG/KG		82	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1200	UG/KG		82	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	430	UG/KG		120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	860	UG/KG		120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	430	UG/KG		82	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	189	%REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BN

Quanterra ID : 21165-003

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection	
							Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/23/99	110 UG/KG		61	1
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/23/99	61 UG/KG	U	61	1
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/23/99	130 UG/KG		61	1
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/23/99	61 UG/KG	U	61	1
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/23/99	66 UG/KG		61	1
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/23/99	61 UG/KG	U	61	1
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/23/99	360 UG/KG		61	1
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/23/99	380 UG/KG		61	1
Benzo(a) Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/23/99	350 UG/KG		43	1
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/23/99	220 UG/KG		43	1
Benzo(b) Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/23/99	290 UG/KG		43	1
Benzo(k) Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/23/99	120 UG/KG		43	1
Benzo(a) Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/23/99	520 UG/KG		43	1
Dibenz(a,h) Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/23/99	140 UG/KG		61	1
Benzo(g,h,i) Perylene	191-24-2	QCBLK198052-1	04/23/99	04/23/99	290 UG/KG		61	1
Indeno(1,2,3-CD) Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/23/99	160 UG/KG		43	1
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/23/99	60 %REC			1



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTPIBF

Quanterra ID : 21165-004

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/23/99	64 UG/KG		42	1
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/23/99	49 UG/KG		42	1
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/23/99	42 UG/KG	U	42	1
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/23/99	42 UG/KG	U	42	1
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/23/99	42 UG/KG	U	42	1
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/23/99	59 UG/KG	U	59	1
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/23/99	42 UG/KG	U	42	1
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/23/99	44 %REC			1



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BE

Quanterra ID : 21165-005

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	5400	UG/KG		120	20
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	740	UG/KG		120	20
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	1500	UG/KG		120	20
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	U	120	20
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	5800	UG/KG		120	20
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	2000	UG/KG		120	20
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	8800	UG/KG		120	20
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	340	UG/KG		120	20
Benzo(a) Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	2900	UG/KG		87	20
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	3600	UG/KG		87	20
Benzo(b) Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	1600	UG/KG		87	20
Benzo(k) Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG		87	20
Benzo(a) Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	7700	UG/KG		87	20
Dibenz(a,h) Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	1800	UG/KG		120	20
Benzo(g,h,i) Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	5000	UG/KG		120	20
Indeno(1,2,3-CD) Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	2600	UG/KG		87	20
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	874	µREC	D		20



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BE DUP

Quanterra ID : 21165-006

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	3400	UG/KG		120	20
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	830	UG/KG		120	20
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	7500	UG/KG		120	20
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	U	120	20
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	2300	UG/KG		120	20
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	750	UG/KG		120	20
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	5400	UG/KG		120	20
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	4100	UG/KG		120	20
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1800	UG/KG		85	20
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	2100	UG/KG		85	20
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	960	UG/KG		85	20
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	840	UG/KG		85	20
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	4600	UG/KG		85	20
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	1700	UG/KG		120	20
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	2900	UG/KG		120	20
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	1600	UG/KG		85	20
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	495	REC	D		20





QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXP3N

Quanterra ID : 21165-007

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection	
							Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	190 UG/KG		120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	500 UG/KG		120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120 UG/KG	U	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	880 UG/KG		120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	280 UG/KG		120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	1400 UG/KG		120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	1200 UG/KG		120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1200 UG/KG		82	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	690 UG/KG		82	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	740 UG/KG		82	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	420 UG/KG		82	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1500 UG/KG		82	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	600 UG/KG		120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	1000 UG/KG		120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	500 UG/KG		82	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	212 *REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTF3W

Quanterra ID : 21165-008

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/24/99	290 UG/KG		59	1
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/24/99	120 UG/KG		59	1
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/24/99	150 UG/KG		59	1
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/24/99	59 UG/KG	U	59	1
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/24/99	240 UG/KG		59	1
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/24/99	78 UG/KG		59	1
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/24/99	580 UG/KG		59	1
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/24/99	260 UG/KG		59	1
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/24/99	310 UG/KG		37	1
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/24/99	190 UG/KG		37	1
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/24/99	170 UG/KG		37	1
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/24/99	37 UG/KG	U	37	1
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/24/99	490 UG/KG		37	1
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/24/99	110 UG/KG		59	1
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/24/99	170 UG/KG		59	1
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/24/99	180 UG/KG		37	1
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/24/99	86 %REC			1



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTPE

Quanterra ID : 21165-009

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG		110	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	160	UG/KG		110	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	420	UG/KG		110	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	110	UG/KG	U	110	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	490	UG/KG		110	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	160	UG/KG		110	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG		110	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	930	UG/KG		110	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	880	UG/KG		80	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	630	UG/KG		80	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	1200	UG/KG		80	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	230	UG/KG		80	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1000	UG/KG		80	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	430	UG/KG		110	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	810	UG/KG		110	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	380	UG/KG		80	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	156	%REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP3F

Quanterra ID : 21165-010

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/24/99	41	UG/KG	U	41	1
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/24/99	41	UG/KG	U	41	1
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/24/99	41	UG/KG	U	41	1
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/24/99	41	UG/KG	U	41	1
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/24/99	41	UG/KG	U	41	1
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/24/99	58	UG/KG	U	58	1
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/24/99	41	UG/KG	U	41	1
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/24/99	75	%REC			1



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTF3S

Quanterra ID : 21165-011

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection	
							Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/24/99	300 UG/KG		60	1
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/24/99	110 UG/KG		60	1
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/24/99	110 UG/KG		60	1
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/24/99	60 UG/KG	U	60	1
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/24/99	180 UG/KG		60	1
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/24/99	61 UG/KG		60	1
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/24/99	550 UG/KG		60	1
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/24/99	210 UG/KG		60	1
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/24/99	300 UG/KG		42	1
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/24/99	180 UG/KG		42	1
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/24/99	180 UG/KG		42	1
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/24/99	100 UG/KG		42	1
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/24/99	510 UG/KG		42	1
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/24/99	60 UG/KG	U	60	1
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/24/99	280 UG/KG		60	1
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/24/99	180 UG/KG		42	1
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/24/99	101 *REC			1



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXT4S

Quanterra ID : 21165-012

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/24/99	490 UG/KG		58	1
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/24/99	530 UG/KG		58	1
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/24/99	310 UG/KG		58	1
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/24/99	58 UG/KG	U	58	1
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/24/99	330 UG/KG		58	1
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/24/99	140 UG/KG		58	1
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/24/99	1000 UG/KG		58	1
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/24/99	450 UG/KG		58	1
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/24/99	480 UG/KG		41	1
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/24/99	270 UG/KG		41	1
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/24/99	310 UG/KG		41	1
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/24/99	41 UG/KG	U	41	1
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/24/99	730 UG/KG		41	1
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/24/99	58 UG/KG	U	58	1
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/24/99	500 UG/KG		58	1
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/24/99	270 UG/KG		41	1
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/24/99	40 %REC			1



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXP4S DUP

Quanterra ID : 21165-013

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1400 UG/KG		110	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	750 UG/KG		110	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		110	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	110 UG/KG	U	110	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	750 UG/KG		110	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	220 UG/KG		110	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	1300 UG/KG		110	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	310 UG/KG		110	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	940 UG/KG		80	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	460 UG/KG		80	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	940 UG/KG		80	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	240 UG/KG		80	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		80	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	440 UG/KG		110	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	860 UG/KG		110	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	420 UG/KG		80	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	189 UG/KG	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXP4N

Quanterra ID : 21165-014

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	2800 UG/KG		120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	1800 UG/KG		120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120 UG/KG	U	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	1900 UG/KG		120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	640 UG/KG		120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	3800 UG/KG		120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1800 UG/KG		81	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	980 UG/KG		81	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	2000 UG/KG		81	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	520 UG/KG		81	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	2500 UG/KG		81	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	1700 UG/KG		120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	770 UG/KG		81	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	438 %REC	D		10





QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXP4E

Quanterra ID : 21165-015

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1900 UG/KG		120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	690 UG/KG		120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	890 UG/KG		120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120 UG/KG	U	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	1600 UG/KG		120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	500 UG/KG		120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	2600 UG/KG		120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1400 UG/KG		81	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	690 UG/KG		81	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	1600 UG/KG		81	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	430 UG/KG		81	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1500 UG/KG		81	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	690 UG/KG		120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG		120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	490 UG/KG		81	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	283 %REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP4F

Quanterra ID : 21165-016

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/24/99	55	UG/KG		42	1
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/24/99	44	UG/KG		42	1
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/24/99	42	UG/KG	U	42	1
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/24/99	42	UG/KG	U	42	1
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/24/99	42	UG/KG	U	42	1
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/24/99	60	UG/KG	U	60	1
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/24/99	42	UG/KG	U	42	1
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/24/99	53	REC			1



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP4W

Quanterra ID : 21165-017

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection	
								Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/24/99	410	UG/KG		59	1
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/24/99	850	UG/KG		59	1
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/24/99	580	UG/KG		59	1
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/24/99	59	UG/KG	U	59	1
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/24/99	200	UG/KG		59	1
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/24/99	59	UG/KG	U	59	1
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/24/99	500	UG/KG		59	1
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/24/99	720	UG/KG		59	1
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/24/99	280	UG/KG		41	1
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/24/99	160	UG/KG		41	1
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/24/99	180	UG/KG		41	1
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/24/99	91	UG/KG		41	1
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/24/99	570	UG/KG		41	1
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/24/99	59	UG/KG	U	59	1
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/24/99	310	UG/KG		59	1
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/24/99	200	UG/KG		41	1
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/24/99	81	%REC			1



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP5N

Quanterra ID : 21165-021

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198053-1	04/23/99	04/26/99	3600	UG/KG		240	20
Acenaphthylene	208-96-8	QCBLK198053-1	04/23/99	04/26/99	240	UG/KG	U	240	20
Acenaphthene	83-32-9	QCBLK198053-1	04/23/99	04/26/99	3500	UG/KG		240	20
Fluorene	86-73-7	QCBLK198053-1	04/23/99	04/26/99	240	UG/KG	U	240	20
Phenanthrene	85-01-8	QCBLK198053-1	04/23/99	04/26/99	3300	UG/KG		240	20
Anthracene	120-12-7	QCBLK198053-1	04/23/99	04/26/99	2600	UG/KG		240	20
Fluoranthene	206-44-0	QCBLK198053-1	04/23/99	04/26/99	10000	UG/KG		240	20
Pyrene	129-00-0	QCBLK198053-1	04/23/99	04/26/99	8000	UG/KG		240	20
Benzo(a)Anthracene	56-55-3	QCBLK198053-1	04/23/99	04/26/99	5900	UG/KG		160	20
Chrysene	218-01-9	QCBLK198053-1	04/23/99	04/26/99	3900	UG/KG		160	20
Benzo(b)Fluoranthene	205-99-2	QCBLK198053-1	04/23/99	04/26/99	5300	UG/KG		160	20
Benzo(k)Fluoranthene	207-08-9	QCBLK198053-1	04/23/99	04/26/99	2200	UG/KG		160	20
Benzo(a)Pyrene	50-32-8	QCBLK198053-1	04/23/99	04/26/99	8800	UG/KG		160	20
Dibenz(a,h)Anthracene	53-70-3	QCBLK198053-1	04/23/99	04/26/99	2600	UG/KG		240	20
Benzo(g,h,i)Perylene	191-24-2	QCBLK198053-1	04/23/99	04/26/99	5200	UG/KG		240	20
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198053-1	04/23/99	04/26/99	2800	UG/KG		160	20
Terphenyl-d14	1718-51-0	QCBLK198053-1	04/23/99	04/26/99	712	%REC	D		20



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Quanterra ID : 21165-022

Client ID: AXTPE

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198053-1	04/23/99	04/26/99	3300	UG/KG		230	20
Acenaphthylene	208-96-8	QCBLK198053-1	04/23/99	04/26/99	580	UG/KG		230	20
Acenaphthene	83-32-9	QCBLK198053-1	04/23/99	04/26/99	2800	UG/KG		230	20
Fluorene	86-73-7	QCBLK198053-1	04/23/99	04/26/99	480	UG/KG		230	20
Phenanthrene	85-01-8	QCBLK198053-1	04/23/99	04/26/99	7000	UG/KG		230	20
Anthracene	120-12-7	QCBLK198053-1	04/23/99	04/26/99	3700	UG/KG		230	20
Fluoranthene	206-44-0	QCBLK198053-1	04/23/99	04/26/99	14000	UG/KG		230	20
Pyrene	129-00-0	QCBLK198053-1	04/23/99	04/26/99	12000	UG/KG		230	20
Benzo(a)Anthracene	56-55-3	QCBLK198053-1	04/23/99	04/26/99	9500	UG/KG		160	20
Chrysene	218-01-9	QCBLK198053-1	04/23/99	04/26/99	6000	UG/KG		160	20
Benzo(b)Fluoranthene	205-99-2	QCBLK198053-1	04/23/99	04/26/99	8200	UG/KG		160	20
Benzo(k)Fluoranthene	207-08-9	QCBLK198053-1	04/23/99	04/26/99	3000	UG/KG		160	20
Benzo(a)Pyrene	50-32-8	QCBLK198053-1	04/23/99	04/26/99	9300	UG/KG		160	20
Dibenz(a,h)Anthracene	53-70-3	QCBLK198053-1	04/23/99	04/26/99	2400	UG/KG		230	20
Benzo(g,h,i)Perylene	191-24-2	QCBLK198053-1	04/23/99	04/26/99	4300	UG/KG		230	20
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198053-1	04/23/99	04/26/99	2600	UG/KG		160	20
Terphenyl-d14	1718-51-0	QCBLK198053-1	04/23/99	04/26/99	1185	*REC	D		20

## **Appendix C**

### **Data Validation**

---

**Data Validation for Coal Storage  
Annex Data  
Surplus Operable Unit  
Fort Sheridan, Illinois**

Prepared for:  
U.S. Army Environmental Center  
Base Closure Division  
Aberdeen Proving Ground, Maryland 21010-5901

Prepared by:  
QST Environmental Inc.  
St. Louis, Missouri

June 28, 1999

QST Project No. 490-2087-0300



## **Table of Contents**

<b>Section</b>	<b>Page</b>
<b>1.0 Introduction</b> .....	<b>1</b>
<b>2.0 Data Validation and Results</b> .....	<b>2</b>
2.1 Validation of Batch 198052 .....	2
2.2 Validation of Batch 198053 .....	3
<b>3.0 Summary and Conclusions</b> .....	<b>4</b>



## 1.0 Introduction

Twenty-two soil samples from the Coal Storage Area (CSA) Annex and the CSA3 sand sampling were prepared and analyzed by Quanterra Inc. (Quanterra) of Earth City, Missouri. The samples were collected on April 21, 1999. The samples were analyzed for polynuclear aromatic hydrocarbons (PAHs) by U.S. Environmental Protection Agency (USEPA) SW-846 Method 8310. The data package received from Quanterra for the soil samples contained a Quality Control Report, but additional quality assurance/quality control information necessary to complete the data review was requested and received from Quanterra under separate cover.

This report presents the results of the analytical level III and level IV data review performed on the 22 soil samples in accordance with the National Functional Guidelines (NFG) for Organic and Inorganic Data Review (USEPA, 1994). The analytical level IV data review was conducted by randomly selecting five samples (or 23 percent) from the 22 samples. The five selected samples were:

<u>Client ID</u>	<u>Lab ID</u>
AXTP1BS	21165-002
AXTP3E	21165-009
AXTP3S	21165-011
AXTP4F	21165-016
CSA3SDW1	21165-019

The analytical sample data were evaluated using the information obtained regarding the following parameters: chain of custody, sample condition receipt report, extraction holding times, analysis holding times, instrument performance check, initial calibration, continuing calibration, blanks, system monitoring compounds (surrogates), matrix spikes/matrix spike duplicates, laboratory control samples, and internal standards (see attached Data Review Checklist). This data validation report discusses areas of concern and any overall issues that affect data quality. Data sample results affected are qualified as necessary in accordance with the NFG.

## 2.0 Data Validation and Results

Sample chain of custodies were completed and signed by appropriate parties. Sample arrival at laboratory noted no exceptions in sample arrival conditions. All samples were extracted and analyzed within method holding times. The set of 22 samples was analyzed in two batches (198052 and 198053). The batches contained the samples as listed below.

Batch 198052				Batch 198053	
Sample ID	Laboratory ID	Sample ID	Laboratory ID	Sample ID	Laboratory ID
AXTP1BW	21165-001	AXTP3E	21165-009	CSA3SDW1	21165-019
AXTP1BW MS	21165-MS	AXTP3F	21165-010	CSA3W3	21165-020
AXTP1BW MSD	21165-MSD	AXTP3S	21165-011	AXTP5N	21165-021
AXTP1BS	21165-002	AXTP4S	21165-012	AXTP5E	21165-022
AXTP1BN	21165-003	AXTP4S	21165-013		
AXTP1BF	21165-004	DUPAXTP4N	21165-014		
AXTP1BE	21165-005	AXTP4E	21165-015		
AXTP1BE DUP	21165-006	AXTP4F	21165-016		
AXTP3N	21165-007	AXTP4W	21165-017		
AXTP3W	21165-008	AXTP5N	21165-018		

### 2.1 Validation of Batch 198052

The method blank was non-detect for all analytes. The laboratory control sample for this batch had all analytes within the QC recovery acceptance limits for the method. Both method blank and laboratory control samples had system monitoring compounds (surrogates) that were within the method QC recovery acceptance criterion (26-106%).

A minor issue on the review of the sample batch was the associated matrix spike (MS) and matrix spike duplicate (MSD) results. The 16 MS sample analytes were not within the QC percent recovery limits as set by the method. The MSD sample was not within the QC recovery limits for 13 of the 16 analytes. The MS/MSD had 2 analytes (chrysene and acenaphthene) that were not within the relative percent differences (RPD) criterion of 25%. No data qualification was made based on the MS/MSD data alone.

The two continuing calibrations for this batch had percent differences that were greater than 15% between the initial and continuing calibration responses for acenaphthene (29.5%, 28.1%) and anthracene (18.8%, 16.8%). Thus, all associated positive detects for acenaphthene and anthracene have been qualified as estimated "J" for the associated samples. The associated samples are 21165-001, 21165-

001MS, 21165-001MSD, 21165-002, 21165-005, 21165-006, 21165-007, 21165-009, 21165-013, 21165-014, 21165-015, 21165-021, and 21165-022.

In addition, samples 21165-001, 21165-001MS, 21165-001MSD, 21165-002, 21165-005, 21165-006, 21165-007, 21165-009, 21165-013, 21165-014, 21165-015, 21165-021, and 21165-022 were found to have system monitoring compounds (surrogates) that were not within the QC acceptance criterion of 26-106%. There were little or no recoveries for these samples because the recoveries were diluted out. In this case, the associated positive sample results and detection limits/non-detects have been qualified as estimated, "J" or "UJ", respectively.

## **2.2 Validation of Batch 198053**

The method blank was non-detects for all analytes. The laboratory control sample for this batch had all analytes within the QC recovery acceptance limits for the method. Both method blank and laboratory control samples had system monitoring compounds (surrogates) that were within the method QC recovery acceptance criterion (26-106%).

The matrix spike (MS) and matrix spike duplicate (MSD) results for this batch were within the QC percent recovery limits as set by the method. The MSD sample was also within the QC recovery limits for the 16 analytes. The MS/MSD had relative percent differences (RPD) that were within the QC acceptance criterion of 25%.

The continuing calibrations for this batch had percent differences that were within 15% between the initial and continuing calibration responses.

The system monitoring compounds (surrogates) for the samples in this batch were within the QC acceptance criterion of 26-106%.

QC in this batch met the required specifications so no action was taken and no samples associated with this batch were qualified.

### **3.0 Summary and Conclusions**

The result of the validation of the 22 soil samples resulted in several of the samples being qualified (see attached data sheets). The qualifiers that were placed on the data were "J" and "UJ". Qualifier "J" means that the associated numerical value is the approximate concentration of the analyte in the sample. Qualifier "UJ" means that the reported quantitation limit is approximate and may or may not represent the actual limit of quantitation necessary to accurately and precisely measure the analyte in the sample.

### **Data Review Checklist**

The data requirements to be checked are listed below:

- ☐ Holding Times
- ☐ Initial Calibration
- ☐ Continuing Calibration
- ☐ Blanks
- ☐ System Monitoring Compounds
- ☐ Matrix Spikes/Matrix Spike Duplicates
- ☐ Laboratory Control Samples
- ☐ Internal Standards

The specific Criteria, Evaluation, and Action for each requirement listed is per the National Functional Guidelines.

## **Appendix A**

### **Qualified Data Sheets**



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BW

Quanterra ID : 21165-001

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	4000	UG/KG	I	120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	650	UG/KG	I	120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	U-I	120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	U-I	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	1800	UG/KG	I	120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	650	UG/KG	I	120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	4500	UG/KG	I	120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	3800	UG/KG	I	120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	2900	UG/KG	I	84	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	1600	UG/KG	I	84	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	2000	UG/KG	I	84	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG	I	84	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	3400	UG/KG	I	84	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	U-I	120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	2400	UG/KG	I	120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG	I	84	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	467	%REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BS

Quanterra ID : 21165-002

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1000	UG/KG	I	120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	160	UG/KG	I	120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	UI	120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	UI	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	630	UG/KG	I	120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	250	UG/KG	I	120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	1600	UG/KG	I	120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	1600	UG/KG	I	120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1200	UG/KG	I	82	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	950	UG/KG	I	82	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	840	UG/KG	I	82	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	360	UG/KG	I	82	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1200	UG/KG	I	82	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	430	UG/KG	I	120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	860	UG/KG	I	120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	430	UG/KG	I	82	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	189	REC	D		10





QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BE

Quanterra ID : 21165-005

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection	
							Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	5400 UG/KG	I	120	20
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	740 UG/KG	I	120	20
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	1500 UG/KG	I	120	20
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120 UG/KG	UI	120	20
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	5800 UG/KG	I	120	20
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	2000 UG/KG	I	120	20
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	8800 UG/KG	I	120	20
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	340 UG/KG	I	120	20
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	2900 UG/KG	I	87	20
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	3600 UG/KG	I	87	20
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	1600 UG/KG	I	87	20
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG	I	87	20
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	7700 UG/KG	I	87	20
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	1800 UG/KG	I	120	20
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	5000 UG/KG	I	120	20
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	2600 UG/KG	I	87	20
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	874 %REC	D		20



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP1BE DUP

Quanterra ID : 21165-006

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	3400	UG/KG	I	120	20
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	830	UG/KG	I	120	20
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	7500	UG/KG	I	120	20
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	UI	120	20
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	2300	UG/KG	I	120	20
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	750	UG/KG	I	120	20
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	5400	UG/KG	I	120	20
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	4100	UG/KG	I	120	20
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1800	UG/KG	I	85	20
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	2100	UG/KG	I	85	20
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	960	UG/KG	I	85	20
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	840	UG/KG	I	85	20
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	4600	UG/KG	I	85	20
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	1700	UG/KG	I	120	20
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	2900	UG/KG	I	120	20
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	1600	UG/KG	I	85	20
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	495	%REC	D		20



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXP3N

Quanterra ID : 21165-007

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG	J	120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	190	UG/KG	J	120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	500	UG/KG	J	120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	UJ	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	880	UG/KG	J	120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	280	UG/KG	J	120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	1400	UG/KG	J	120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	1200	UG/KG	J	120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1200	UG/KG	J	82	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	690	UG/KG	J	82	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	740	UG/KG	J	82	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	420	UG/KG	J	82	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1500	UG/KG	J	82	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	600	UG/KG	J	120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	1000	UG/KG	J	120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	500	UG/KG	J	82	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	212	REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTPE

Quanterra ID : 21165-009

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG	I	110	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	160 UG/KG	I	110	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	420 UG/KG	I	110	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	110 UG/KG	U I	110	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	490 UG/KG	I	110	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	160 UG/KG	I	110	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG	I	110	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	930 UG/KG	I	110	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	880 UG/KG	I	80	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	630 UG/KG	I	80	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	1200 UG/KG	I	80	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	230 UG/KG	I	80	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1000 UG/KG	I	80	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	430 UG/KG	I	110	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	810 UG/KG	I	110	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	380 UG/KG	I	80	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	156 %REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXP4S DUP

Quanterra ID : 21165-013

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1400 UG/KG	J	110	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	750 UG/KG	J	110	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG	J	110	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	110 UG/KG	UJ	110	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	750 UG/KG	J	110	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	220 UG/KG	J	110	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	1300 UG/KG	J	110	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	310 UG/KG	J	110	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	940 UG/KG	J	80	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	460 UG/KG	J	80	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	940 UG/KG	J	80	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	240 UG/KG	J	80	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG	J	80	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	440 UG/KG	J	110	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	860 UG/KG	J	110	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	420 UG/KG	J	80	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	189 UG/KG	REC D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXP4N

Quanterra ID : 21165-014

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result	Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	2800	UG/KG	I	120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG	I	120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	1800	UG/KG	I	120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120	UG/KG	U	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	1900	UG/KG	I	120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	640	UG/KG	I	120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	3800	UG/KG	I	120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG	I	120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1800	UG/KG	I	81	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	980	UG/KG	I	81	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	2000	UG/KG	I	81	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	520	UG/KG	I	81	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	2500	UG/KG	I	81	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	1100	UG/KG	I	120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	1700	UG/KG	I	120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	770	UG/KG	I	81	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	438	%REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP4E

Quanterra ID : 21165-015

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198052-1	04/23/99	04/26/99	1900 UG/KG	I	120	10
Acenaphthylene	208-96-8	QCBLK198052-1	04/23/99	04/26/99	690 UG/KG	I	120	10
Acenaphthene	83-32-9	QCBLK198052-1	04/23/99	04/26/99	890 UG/KG	I	120	10
Fluorene	86-73-7	QCBLK198052-1	04/23/99	04/26/99	120 UG/KG	U-I	120	10
Phenanthrene	85-01-8	QCBLK198052-1	04/23/99	04/26/99	1600 UG/KG	I	120	10
Anthracene	120-12-7	QCBLK198052-1	04/23/99	04/26/99	500 UG/KG	I	120	10
Fluoranthene	206-44-0	QCBLK198052-1	04/23/99	04/26/99	2600 UG/KG	I	120	10
Pyrene	129-00-0	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG	I	120	10
Benzo(a)Anthracene	56-55-3	QCBLK198052-1	04/23/99	04/26/99	1400 UG/KG	I	81	10
Chrysene	218-01-9	QCBLK198052-1	04/23/99	04/26/99	690 UG/KG	I	81	10
Benzo(b)Fluoranthene	205-99-2	QCBLK198052-1	04/23/99	04/26/99	1600 UG/KG	I	81	10
Benzo(k)Fluoranthene	207-08-9	QCBLK198052-1	04/23/99	04/26/99	430 UG/KG	I	81	10
Benzo(a)Pyrene	50-32-8	QCBLK198052-1	04/23/99	04/26/99	1500 UG/KG	I	81	10
Dibenz(a,h)Anthracene	53-70-3	QCBLK198052-1	04/23/99	04/26/99	690 UG/KG	I	120	10
Benzo(g,h,i)Perylene	191-24-2	QCBLK198052-1	04/23/99	04/26/99	1100 UG/KG	I	120	10
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198052-1	04/23/99	04/26/99	490 UG/KG	I	81	10
Terphenyl-d14	1718-51-0	QCBLK198052-1	04/23/99	04/26/99	283 %REC	D		10



QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Client ID: AXTP5N

Quanterra ID : 21165-021

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198053-1	04/23/99	04/26/99	3600 UG/KG	J	240	20
Acenaphthylene	208-96-8	QCBLK198053-1	04/23/99	04/26/99	240 UG/KG	45	240	20
Acenaphthene	83-32-9	QCBLK198053-1	04/23/99	04/26/99	3500 UG/KG	45	240	20
Fluorene	86-73-7	QCBLK198053-1	04/23/99	04/26/99	240 UG/KG	45	240	20
Phenanthrene	85-01-8	QCBLK198053-1	04/23/99	04/26/99	3300 UG/KG	45	240	20
Anthracene	120-12-7	QCBLK198053-1	04/23/99	04/26/99	2600 UG/KG	45	240	20
Fluoranthene	206-44-0	QCBLK198053-1	04/23/99	04/26/99	10000 UG/KG	45	240	20
Pyrene	129-00-0	QCBLK198053-1	04/23/99	04/26/99	8000 UG/KG	45	240	20
Benzo(a)Anthracene	56-55-3	QCBLK198053-1	04/23/99	04/26/99	5900 UG/KG	45	160	20
Chrysene	218-01-9	QCBLK198053-1	04/23/99	04/26/99	3900 UG/KG	45	160	20
Benzo(b)Fluoranthene	205-99-2	QCBLK198053-1	04/23/99	04/26/99	5300 UG/KG	45	160	20
Benzo(k)Fluoranthene	207-08-9	QCBLK198053-1	04/23/99	04/26/99	2200 UG/KG	45	160	20
Benzo(a)Pyrene	50-32-8	QCBLK198053-1	04/23/99	04/26/99	8800 UG/KG	45	160	20
Dibenz(a,h)Anthracene	53-70-3	QCBLK198053-1	04/23/99	04/26/99	2600 UG/KG	45	240	20
Benzo(g,h,i)Perylene	191-24-2	QCBLK198053-1	04/23/99	04/26/99	5200 UG/KG	45	240	20
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198053-1	04/23/99	04/26/99	2800 UG/KG	45	160	20
Terphenyl-d14	1718-51-0	QCBLK198053-1	04/23/99	04/26/99	712 %REC	D		20





QST  
11655 Lilburne Prk Road  
St. Louis, MO 63146

Project: 833.02

Category: PAH  
Method: EPA 8310  
Matrix: Soil

Sample Date : 04/21/99  
Receipt Date : 04/22/99  
Report Date : 04/30/99

Quanterra ID : 21165-022

Client ID: AXTPE

Analyte	CAS Number	Blank Sample Name	Prep. Date	Analyses Date	Result Unit	Qual.	Detection Limit	Dilution
Naphthalene	91-20-3	QCBLK198053-1	04/23/99	04/26/99	3300 UG/KG	H	230	20
Acenaphthylene	208-96-8	QCBLK198053-1	04/23/99	04/26/99	580 UG/KG	H	230	20
Acenaphthene	83-32-9	QCBLK198053-1	04/23/99	04/26/99	2800 UG/KG	H	230	20
Fluorene	86-73-7	QCBLK198053-1	04/23/99	04/26/99	480 UG/KG	H	230	20
Phenanthrene	85-01-8	QCBLK198053-1	04/23/99	04/26/99	7000 UG/KG	H	230	20
Anthracene	120-12-7	QCBLK198053-1	04/23/99	04/26/99	3700 UG/KG	H	230	20
Fluoranthene	206-44-0	QCBLK198053-1	04/23/99	04/26/99	14000 UG/KG	H	230	20
Pyrene	129-00-0	QCBLK198053-1	04/23/99	04/26/99	12000 UG/KG	H	230	20
Benzo(a)Anthracene	56-55-3	QCBLK198053-1	04/23/99	04/26/99	9500 UG/KG	H	160	20
Chrysene	218-01-9	QCBLK198053-1	04/23/99	04/26/99	6000 UG/KG	H	160	20
Benzo(b)Fluoranthene	205-99-2	QCBLK198053-1	04/23/99	04/26/99	8200 UG/KG	H	160	20
Benzo(k)Fluoranthene	207-08-9	QCBLK198053-1	04/23/99	04/26/99	3000 UG/KG	H	160	20
Benzo(a)Pyrene	50-32-8	QCBLK198053-1	04/23/99	04/26/99	9300 UG/KG	H	160	20
Dibenz(a,h)Anthracene	53-70-3	QCBLK198053-1	04/23/99	04/26/99	2400 UG/KG	H	230	20
Benzo(g,h,i)Perylene	191-24-2	QCBLK198053-1	04/23/99	04/26/99	4300 UG/KG	H	230	20
Indeno(1,2,3-CD)Pyrene	193-39-5	QCBLK198053-1	04/23/99	04/26/99	2600 UG/KG	H	160	20
Terphenyl-d14	1718-51-0	QCBLK198053-1	04/23/99	04/26/99	1185 %REC	D		20